

Code: SILVER

## DUAL TECHNOLOGY DETECTOR MICROWAVE + PIR **SILVER** SATEL

Net: **32.29 EUR** Gross: **32.29 EUR**

Digital dual technology detector equipped with PIR and microwave detection. The device has implemented an extended operation modes of PIR + MW detectors.




### SPECIFICATION

|                                   |                                                                                                                                                             |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application:                      | Indoor                                                                                                                                                      |
| Pyroelectric sensor:              | Double                                                                                                                                                      |
| Sensor type:                      | Passive Infra Red (PIR) and microwave (MW)                                                                                                                  |
| Range:                            | 18 x 18 m                                                                                                                                                   |
| Sensitivity adjustment:           | <ul style="list-style-type: none"><li>• PIR detector - By potentiometer</li><li>• Microwave (MW) - By potentiometer</li></ul>                               |
| Operation modes:                  | <ul style="list-style-type: none"><li>• Basic</li><li>• Advanced - reaction type configuration selection</li><li>• 2EOL/NC configurations support</li></ul> |
| Microwave frequency band:         | 10.525 GHz                                                                                                                                                  |
| Antimask feature:                 | ✓                                                                                                                                                           |
| Alarm time:                       | 2 s                                                                                                                                                         |
| Maximal outputs load:             | 40 mA / 16 V DC                                                                                                                                             |
| Digital temperature compensation: | ✓                                                                                                                                                           |
| Power supply:                     | 12 V DC / 25 mA                                                                                                                                             |
| Operation temp:                   | -30 °C ... 55 °C                                                                                                                                            |
| Target speed range:               | 0.3 ... 3 m/s                                                                                                                                               |
| Weight:                           | 0.12 kg                                                                                                                                                     |
| Dimensions:                       | 62 x 136 x 49 mm                                                                                                                                            |


|                       |         |
|-----------------------|---------|
| Manufacturer / Brand: | SATEL   |
| Guarantee:            | 2 years |

PRESENTATION

Internal view:

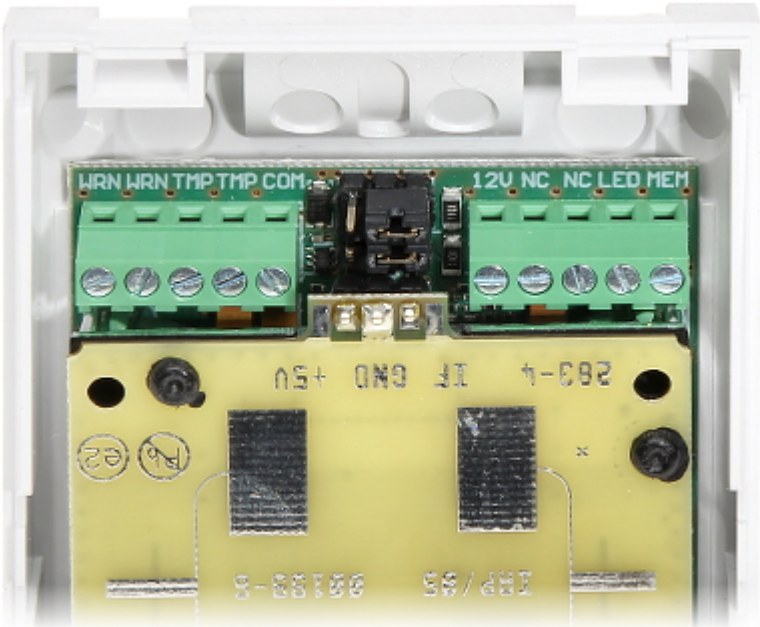


Description of particular elements of the device:

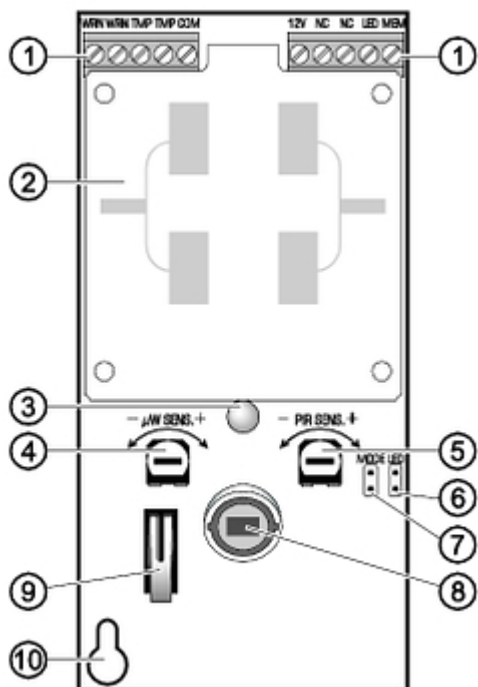

1. cable terminals
2. MW detector
3. LED indicator
4. potentiometer for sensitivity control MW
5. potentiometer for sensitivity control PIR
6. LED indication settings
7. configuration jumpers
8. pyroelectric sensor
9. tamper contact
10. fixing screw hole

Detector range:

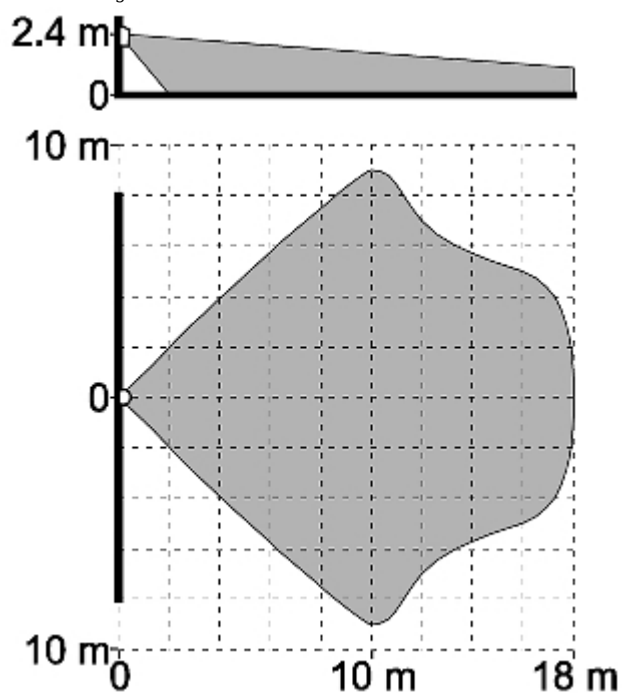

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

