

Code: 12V/1.5A/PROTEC

POWER SUPPLY ADAPTER 12V/1.5A/PROTEC

Net: 4.51 EUR Gross: 4.51 EUR

The Protec company switching adapter with splash-proof, aesthetic casing. It is designed to outdoor mount on the wall (for IP53 norm is recommended installing the device under a roof). The video and power connectors are placed without any problem inside adapter's casing. The adaptor should be correctly installed in vertical position with connectors down.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current.

Please pay attention for proper cooling conditions of the power adaptor during work!

The Power Supply Unit complies with the ecodesign requirements (ErP 2009/125/EC Directive and its implementing Regulation No. 278/2009 regarding external power supplies). The device meets, among others, the requirements of the average active efficiency and power consumption at no-load condition.



SPECIFICATION


Adapter type:	Switching
Power voltage:	230 V AC
Output voltage:	12 V DC
Maximal load:	1.5 A
Output power:	18 W
Average active efficiency:	85.3 %
Power consumption at no-load:	< 0.1 W
Protections:	• Overload • Short-circuit
Number of outputs:	1 pcs
Power connectors type:	2.1/5.5 mm - Straight plug
Housing type:	Plastic
"Index of Protection":	IP53
Main features:	Splash-proof casing
Operation temp:	-30 °C ... 40 °C
Weight:	0.17 kg
Dimensions:	130 x 80 x 38 mm
Guarantee:	2 years

PRESENTATION

Power adaptor with closed cover:




Internal view, after remove the cover:

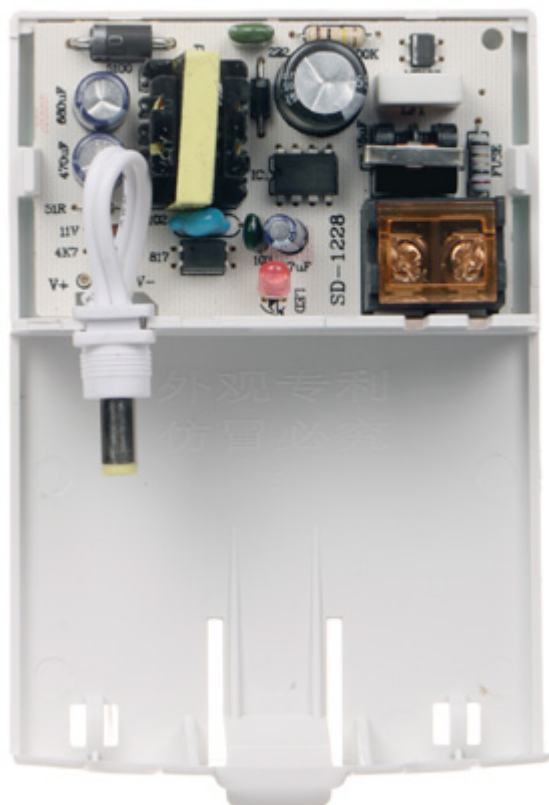

Rear view:



2.1/5.5mm plug polarization:

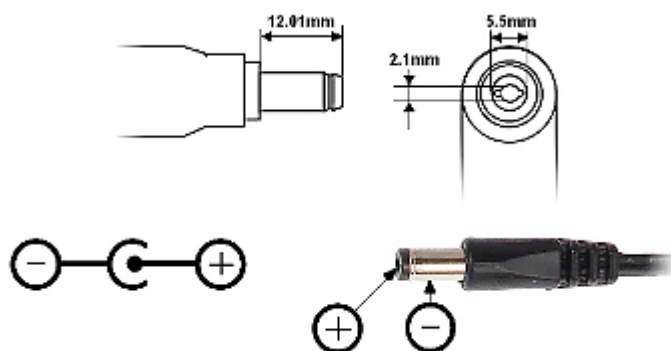

OUR OPINIONS



- Quite comfortable AC 230V cable connection.



- Due to limited diameter of the cable entry, must use the cables with small diameters.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------