

Code: PSDC-08128

## SWITCHING ADAPTER **PSDC-08128**

Net: **99.17 EUR** Gross: **99.17 EUR**

Power adapter is equipped with aesthetic, solidly made metal casing box. Power adapter output voltage is DC 12V. It allows to connect up to 8 devices. Maximal load for the one output is 1A, but you should remember the total load for all outputs must be lower than 8A. Each output is protected independently with glass or PTC polymer fuse (jumper selection). Please pay attention for proper cooling conditions of the power adaptor during work!



### SPECIFICATION

|                                                                                |                                                                                                                                                 |
|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Adapter type:                                                                  | Switching                                                                                                                                       |
| Output voltage:                                                                | 12 ... 15 V DC                                                                                                                                  |
| Output voltage adjustment:                                                     | ✓ By potentiometer                                                                                                                              |
| Max. output current (total):                                                   | 8 A                                                                                                                                             |
| Max. output current for single output:                                         | 1 A                                                                                                                                             |
| Outputs protection:                                                            | 1 A Polymer / Glass Fuse                                                                                                                        |
| LED indication:                                                                | ✓                                                                                                                                               |
| AW output (fault) - OC type 50mA, LED indication of at least one output fault: | ✓                                                                                                                                               |
| Protection:                                                                    | <ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overvoltage</li><li>• Overload</li><li>• Overvoltage</li><li>• Tamper</li></ul> |
| Input voltage:                                                                 | 176 ... 264 V @ 50Hz                                                                                                                            |
| Power:                                                                         | 120 W (max)                                                                                                                                     |
| Number of outputs:                                                             | 8                                                                                                                                               |
| Connector type:                                                                | Cable terminals                                                                                                                                 |
| Housing type:                                                                  | Metal, wall-mounted                                                                                                                             |
| Key closed:                                                                    | —                                                                                                                                               |
| Operation temp. / Relative humidity:                                           | -10 ... 50 °C / 20 ... 90 %                                                                                                                     |
| Weight:                                                                        | 2 kg                                                                                                                                            |
| Dimensions:                                                                    | 280 x 256 x 58 mm                                                                                                                               |
| Manufacturer / Brand:                                                          | PULSAR                                                                                                                                          |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Guarantee:


2 years

## PRESENTATION

Front view:




Front panel view:

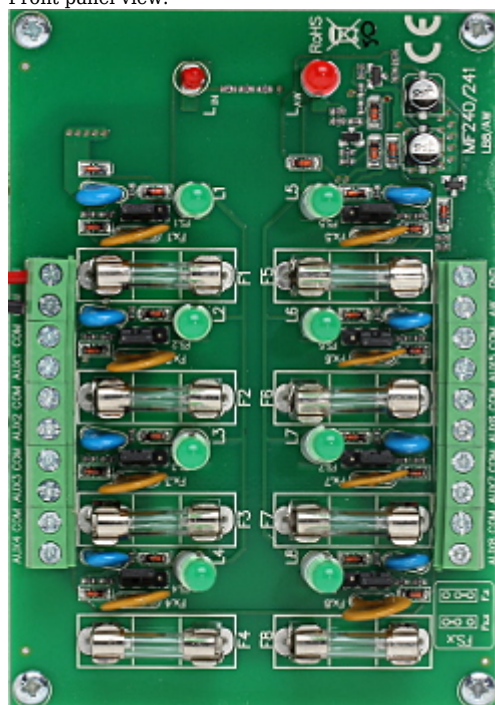



Dimensions:

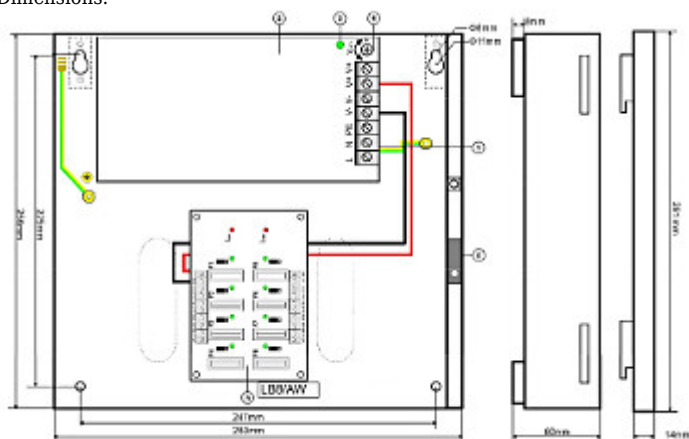

Rear view:



In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



#### PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

