


Code: PSDCSEP-04124

SWITCHING ADAPTER **PSDCSEP-04124**

Net: **141.96 EUR** Gross: **141.96 EUR**

Power adapter is equipped with aesthetic, solidly made metal casing box. Power adapter output voltage is DC 12 ... 15V. It allows to connect up to 4 devices with separate adjustment and galvanic isolation of each channel. Maximal load for the one output is 1A, but you should remember the total load for all outputs must be lower than 4A. Each output is protected independently with glass or PTC polymer fuse (jumper selection). Please pay attention for proper cooling conditions of the power adaptor during work!

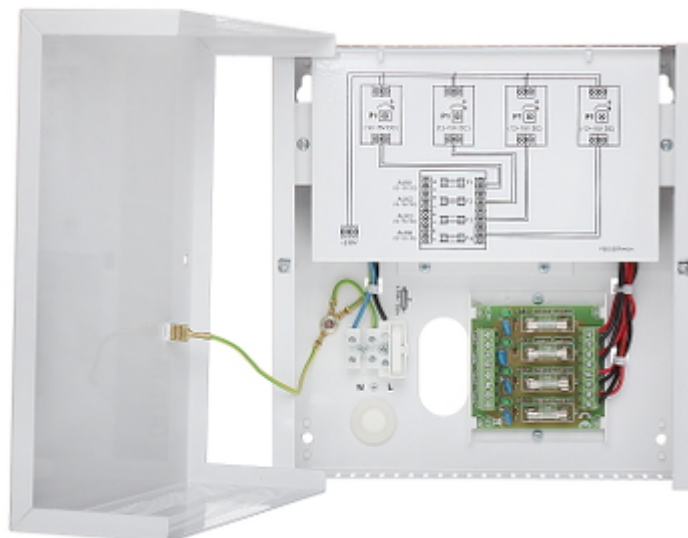

SPECIFICATION



Adapter type:	Switching
Output voltage:	12 ... 15 V DC
Output voltage adjustment:	Separate adjustment for each channel - By potentiometer
Max. output current (total):	4 A
Max. output current for single output:	1 A
Outputs protection:	4 x 1 A - Glass Fuse
LED indication:	✓
Main features:	4 separate, galvanic isolated outputs
Protection:	• Short-circuit • Overload • Overvoltage • Overvoltage
Input voltage:	85 V ... 264 V AC
Power:	48 W (max)
Number of outputs:	4
Connector type:	Cable terminals
Housing type:	Metal, wall-mounted
Key closed:	—
Weight:	2.3 kg
Dimensions:	220 x 210 x 80 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Internal view of the housing:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

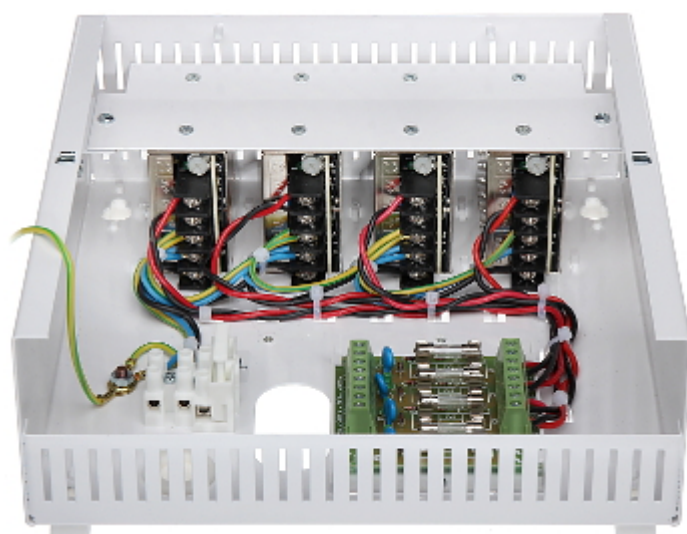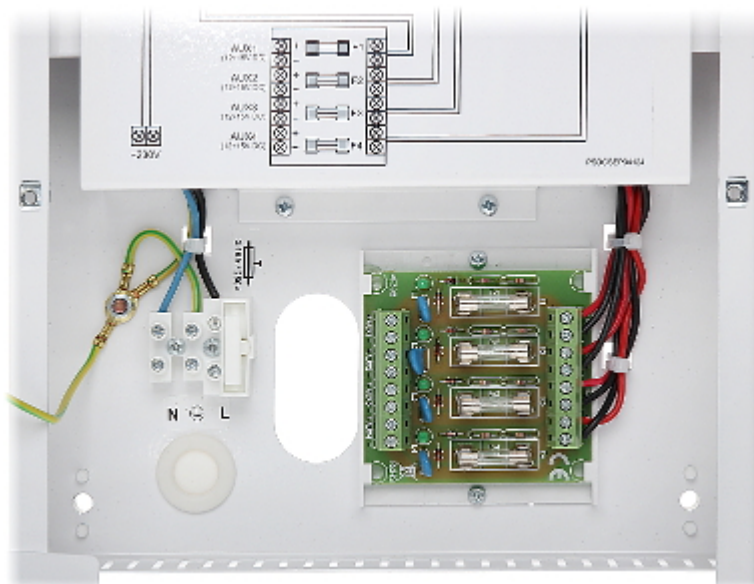


Power adapter in closed casing:



Mounting side view:



Dimensions:

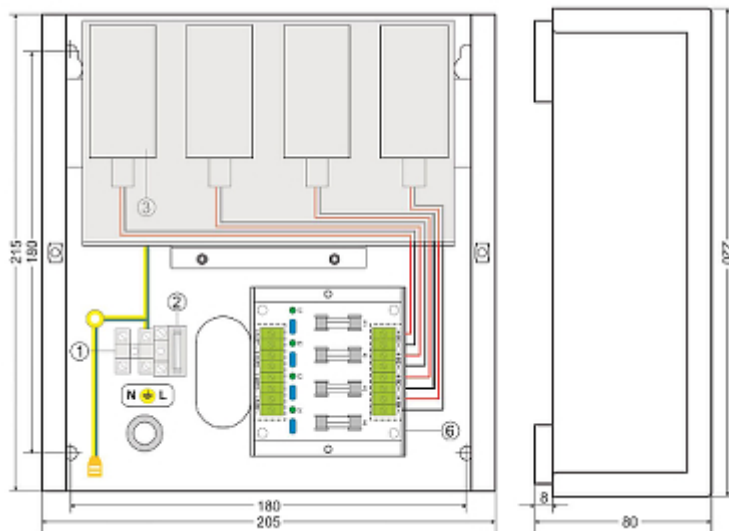

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------