

Code: MDR-100-12

SWITCHING ADAPTER **MDR-100-12**

Net: **58.56 EUR** Gross: **58.56 EUR**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 60°C).



**SPECIFICATION**

|                                      |                                                                                                                     |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Adapter type:                        | Switching                                                                                                           |
| Power voltage:                       | 100 ... 240 V AC                                                                                                    |
| Output voltage:                      | 12 V DC                                                                                                             |
| Output voltage adjustment:           | 12 ... 15 V                                                                                                         |
| Voltage tolerance:                   | ± 1 %                                                                                                               |
| Maximal load:                        | 7.5 A                                                                                                               |
| Output power:                        | 90 W                                                                                                                |
| Number of outputs:                   | 1 pcs                                                                                                               |
| Efficiency:                          | 85 %                                                                                                                |
| Housing type:                        | DIN                                                                                                                 |
| MTBF (Mean Time Between Faults):     | 346000 hours                                                                                                        |
| Vibration resistance:                | IEC60068-2-6, 10 ... 500 Hz max. 2 G for 90 minutes                                                                 |
| Protections:                         | <ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overvoltage</li><li>• Overload protection</li></ul> |
| Operation temp. / Relative humidity: | -10 °C ... 60 °C / < 95 %                                                                                           |
| Weight:                              | 0.42 kg                                                                                                             |
| Dimensions:                          | 55 x 100 x 90 mm                                                                                                    |



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Guarantee:

3 years

## PRESENTATION

Front panel:



Adapter connectors:




Side view:



Rear panel (DIN rail installation):



Dimensions:

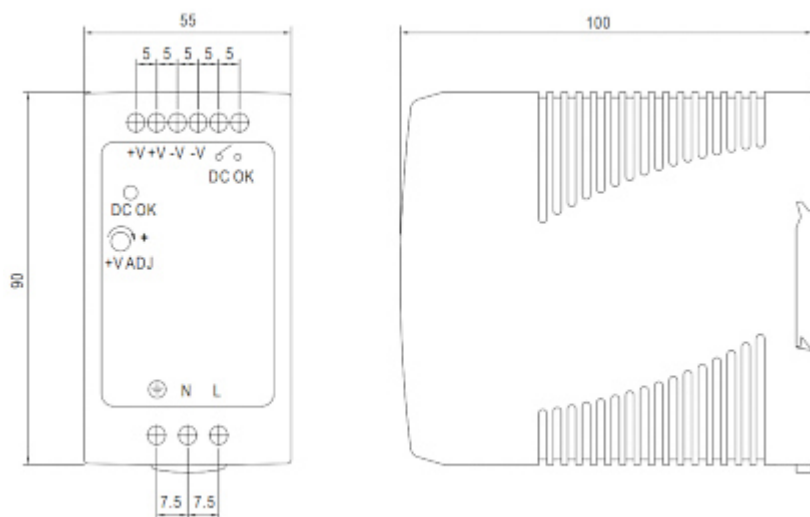

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|