

Code: MDR-20-12

SWITCHING ADAPTER **MDR-20-12**

Net: **98.56 PLN** Gross: **98.56 PLN**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



SPECIFICATION

Adapter type:	Switching
Power voltage:	100 ... 240 V AC
Output voltage:	12 V DC
Output voltage adjustment:	10.8 ... 13.2 V
Voltage tolerance:	± 1 %
Maximal load:	1.67 A
Output power:	20 W
Number of outputs:	1 pcs
Efficiency:	80 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	236900 hours
Vibration resistance:	IEC60068-2-6, 10 ... 500 Hz max. 2 G for 90 minutes
Protections:	• Short-circuit • Overvoltage • Overload protection
Operation temp. / Relative humidity:	-20 °C ... 70 °C / < 90 %
Weight:	0.15 kg
Dimensions:	22.5 x 100 x 90 mm
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front panel:




Side view:



Rear panel (DIN rail installation):



Dimensions:

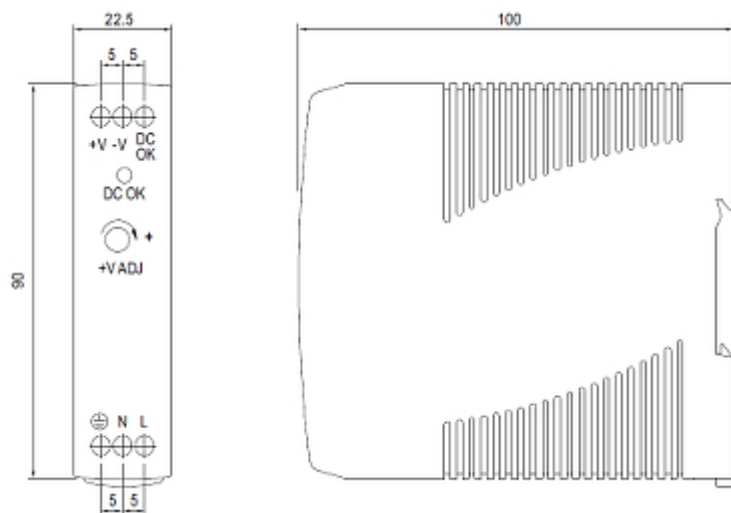

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60