

Code: ZR12-150/LZ-16/POL

POWER SUPPLY ADAPTER RACK **ZR12-150/LZ-16/POL** 12 V DC 12.5 A

Net: **77.98 EUR** Gross: **77.98 EUR**

The ZR12-150/LZ-16/POL unit is intended for power the devices, and systems requiring DC 12V and total load up to 12.5A.



SPECIFICATION

Adapter type:	Switching
Power voltage:	selectable by switch • 90 V ... 132 V AC, • 180 V ... 264 V AC
Voltage frequency range:	47 ... 63 Hz
Output power:	150 W
Output voltage:	12 V DC (typical)
Output voltage adjustment:	11.4 V ... 13.5 V DC
Maximal load:	12.5 A
Efficiency:	89 %
MTBF (Mean Time Between Faults):	> 700000 h - Telcordia SR-332
Number of outputs:	16 pcs - two-terminal elements
Protections:	• Overvoltage • Short-circuit • Overload • 16 x 0.75 A - Polymer fuse
Main features:	LED indication - Input voltage, Output voltage
Manufacturer / Brand:	DELTA
Housing type:	1 U Rack 19"
Operation temp. / Relative humidity:	-10 °C ... 70 °C / 10 % ... 95 %
Weight:	0.805 kg
Dimensions:	483 x 44 x 105 mm
Guarantee:	5 years

PRESENTATION


Front panel:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Top view:

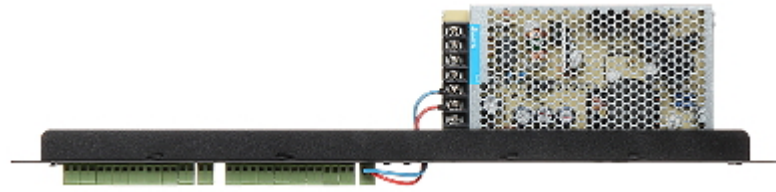

Adapter connectors:

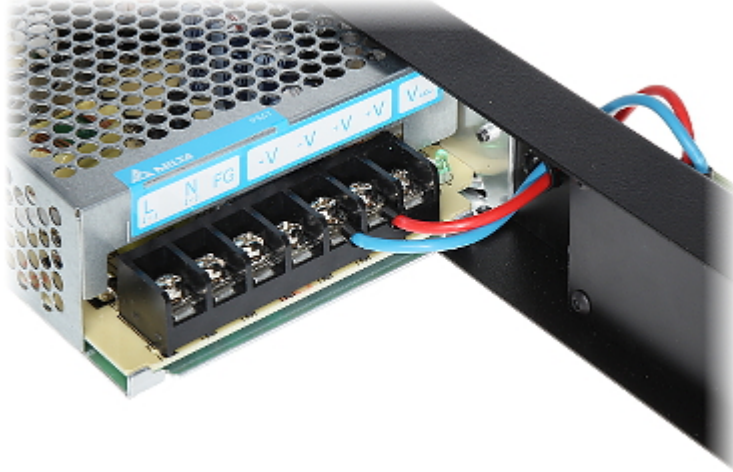


Rear view:



Input voltage switch:




Power path diagram:

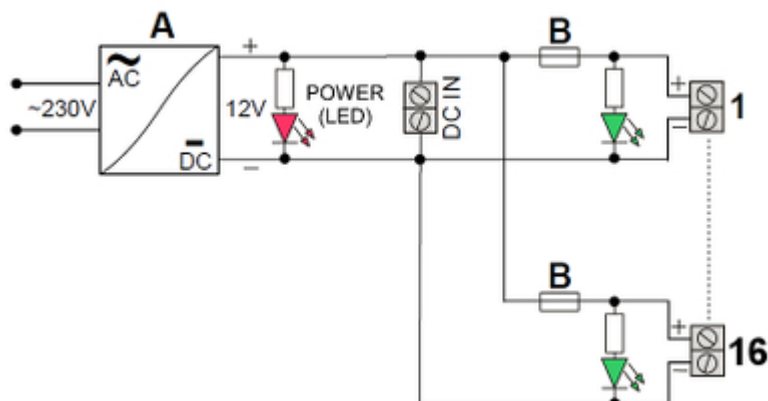

A) Switching power adapter 230V AC / 12V DC (12.5A)

B) Polymer fuse

Connectors description:

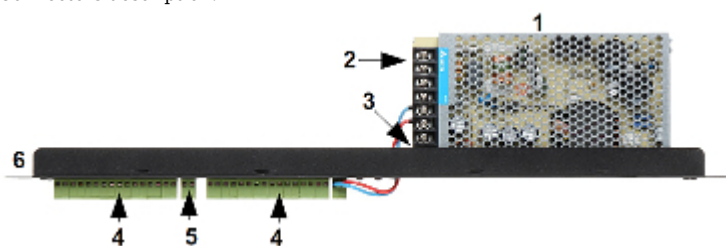

1) Switching power adapter 230V AC / 12V DC (12.5A)

2) AC 230V

3) Output voltage adjustment

4) Power outputs cable terminals

5) The cable terminal to connect 12V power supply from power adapter to for example other LZ-xx (it is not protected by a fuse)

6) Rack panel

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------