

Code: 12V/15A/P

## SWITCHING ADAPTER 12V/15A/P

Net: 55.00 PLN Gross: 67.65 PLN

Power adapter with two pairs of output terminals.  
Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work! Inside Rack cabinets and at poor conditioning places we recommend to use together with adaptor the following elements: A19-W12 Rack Fan and FR-1 Fan Speed Control.  
**Attention!** Both terminals of V- have a physical contact to each other, as well as the both terminals of V+




### SPECIFICATION

|                                      |  |
|--------------------------------------|--|
| Adapter type:                        | Switching  |
| Power voltage:                       | 230 V AC   |
| Output voltage:                      | 12 V DC  |
| Output voltage adjustment:           | 9.8 ... 13 V   |
| Maximal load:                        | 15 A   |
| Output power:                        | 180 W  |
| Number of outputs:                   | 2 pcs  |
| Protections:                         | <ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overload</li></ul> |
| Operation temp. / Relative humidity: | -10 °C ... 50 °C / 20 % ... 90 %   |
| Weight:                              | 0.56 kg  |
| Dimensions:                          | 200 x 100 x 43 mm  |
| Guarantee:                           | 2 years  |

### PRESENTATION

Adapter connectors:

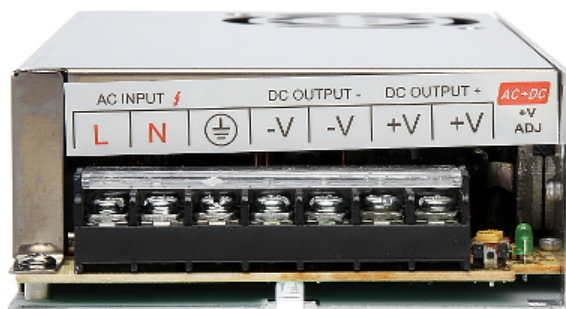

L - Live wire (230V)  
N - Neutral wire  
GND - Grounding  
-V - DC "-" output  
+V - DC "+" output  
ADJ - Output voltage adjustment

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60