

Code: AD-155A

BUFFERED POWER SUPPLY ADAPTER AD-155A

Net: 105.32 EUR Gross: 105.32 EUR

The buffered power supply adapter is designed for powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!



SPECIFICATION


Adapter type:	Switching
Power voltage:	100 ... 240 V AC
Output voltage:	13.8 V DC
Output voltage adjustment:	12 ... 14.5 V
Maximal load:	10.5 A
Battery charging current:	0.5 A
Output power:	145 W
Efficiency:	80 %
Number of outputs:	1 pcs
Protections:	• Overvoltage • Overload protection
COLD START - Cold start of the power adapter:	✓
Operation temp. / Relative humidity:	-10 °C ... 60 °C / 20 % ... 90 %
Supported standards:	UL60950-1, TUV EN60950-1
EMI conduction and radiation:	Compliance to EN55022 (CISPR22) class B
Harmonic:	Compliance to EN61000-3-2,-3 standard
EMS immunity:	Compliance with EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204, EN55024, EN61000-6-1 standards
Weight:	0.8 kg
Dimensions:	199 x 111 x 50 mm
Guarantee:	2 years

PRESENTATION


Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

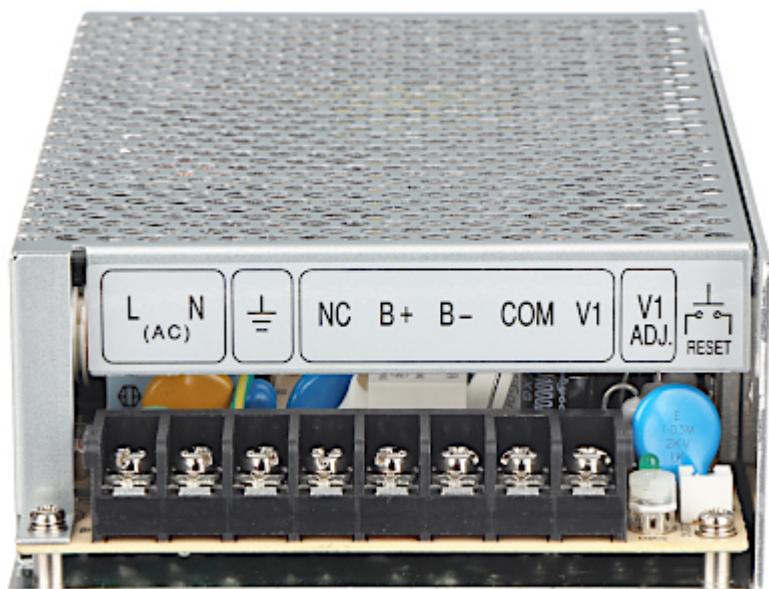

Adapter connectors:

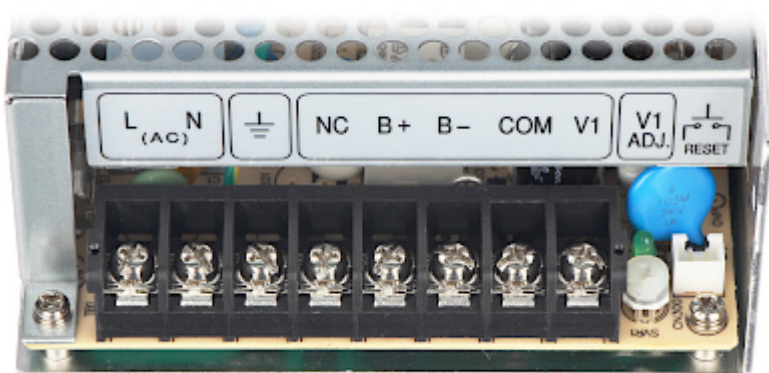

L - Live wire (230V)
 N - Neutral wire
 GND - Grounding
 NC Not connected
 +B - (+) battery output
 -B - (-) battery output
 COM - DC "-" output
 V1 - DC "+" output
 ADJ - Output voltage adjustment
 RESET Cold start

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------