


Code: PK4-12-ZD

NORMALLY OPEN RELAY MODULE **PK4-12-ZD** DELTA

Net: **21.35 EUR** Gross: **21.35 EUR**

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

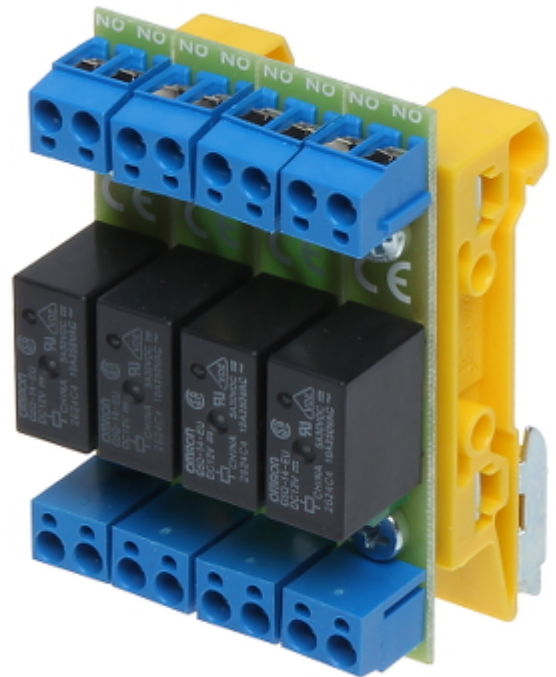

SPECIFICATION


Number of relay outputs:	4
Power supply:	10 ... 16 V DC
Current consumption:	35 mA per each relay at voltage 12 V DC
Relay maximal load:	10 A (max), 30 V DC / 50 V AC (max)
Output:	4 x NO/NC
Application:	relay for electromagnetic lock/electric strike
Main features:	• DIN, TS-35 rail mounting, • LED indication, • Protections : Overvoltage, Reverse polarity connection
Operation temp:	-10 °C ... 40 °C
Weight:	0.08 kg
Dimensions:	73 x 44 x 40 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years


PRESENTATION

Top view:




Connectors:

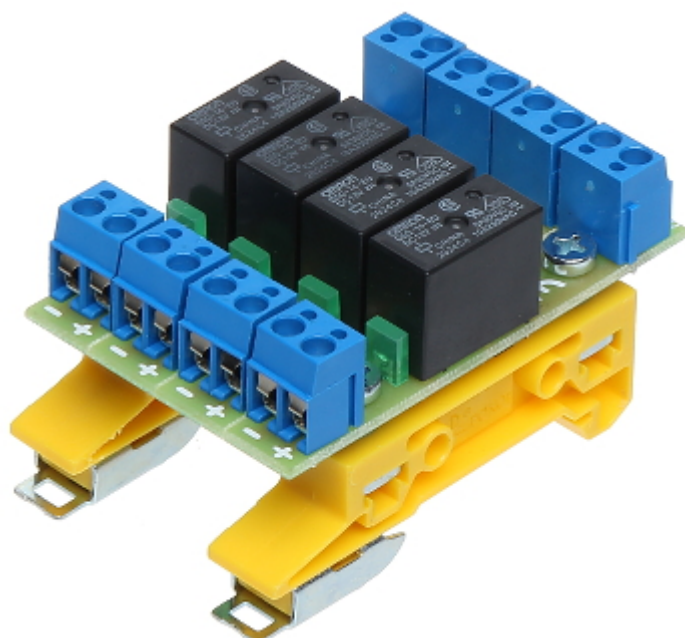


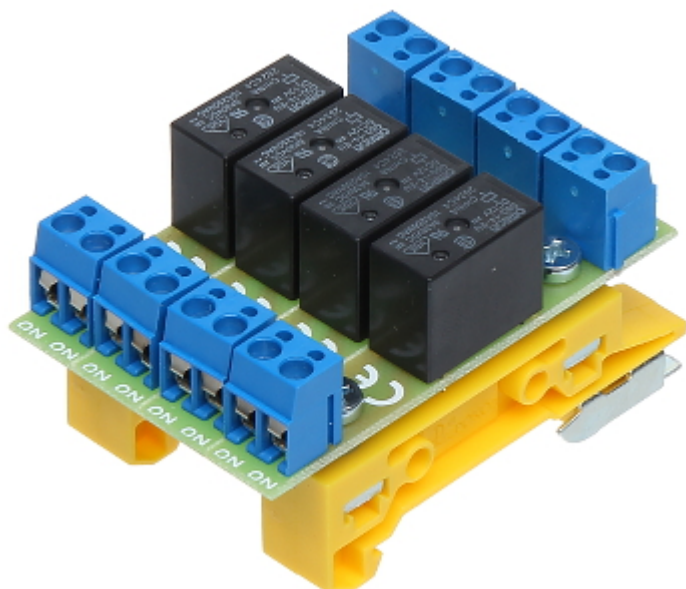

Mounting side view:

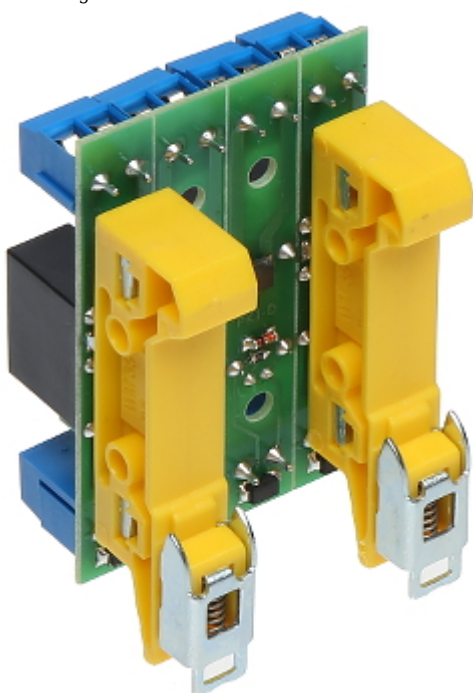

Schematic diagram:

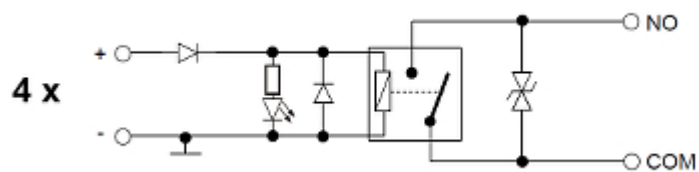

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60