


Code: AWZ-525

## TIME RELAY MODULE AWZ-525

Net: 14.58 EUR Gross: 14.58 EUR

The AWZ-525 allows the extension of the short trigger pulse for the time set by potentiometer. The device can operate in 2 modes: extension of time activated by the pulse or by the triggering signal loss.

The device can be used to extend short control pulses, controlling the operation of bolts, electromagnetic jumpers, bistable control, and also to make the shift in access control projects, depending on the status of the controller, door opening sensor (reed), exit button, etc.

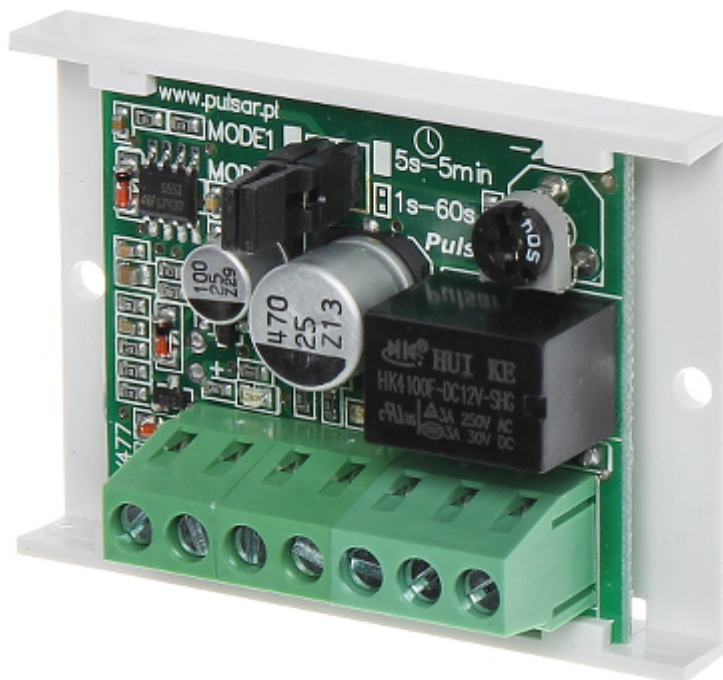


### SPECIFICATION


|                          |                                                                                                                                                                       |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of relay outputs: | 1                                                                                                                                                                     |
| Power supply:            | 10 ... 14 V DC                                                                                                                                                        |
| Current consumption:     | 25 mA (max)                                                                                                                                                           |
| Relay maximal load:      | 1 A (max) @ 30 V DC / 50 V AC (max)                                                                                                                                   |
| Output:                  | 1 x NO/NC                                                                                                                                                             |
| Main features:           | <ul style="list-style-type: none"><li>• Time settings range</li><li>1. Range : 1 s ... 60 s ,</li><li>2. Range : 5 s ... 5 minutes</li><li>• LED indication</li></ul> |
| Operation temp:          | -10 °C ... 40 °C                                                                                                                                                      |
| Weight:                  | 0.03 kg                                                                                                                                                               |
| Dimensions:              | 59 x 43 x 22 mm                                                                                                                                                       |
| Manufacturer / Brand:    | PULSAR                                                                                                                                                                |
| Guarantee:               | 2 years                                                                                                                                                               |

### PRESENTATION

Top view:

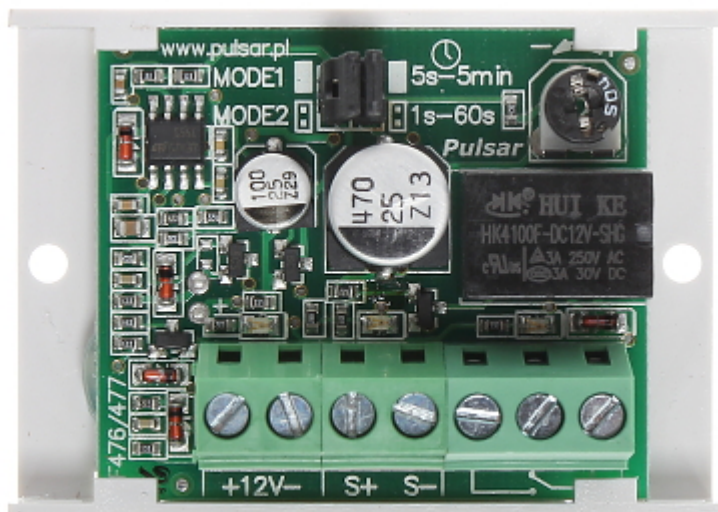

Connectors:

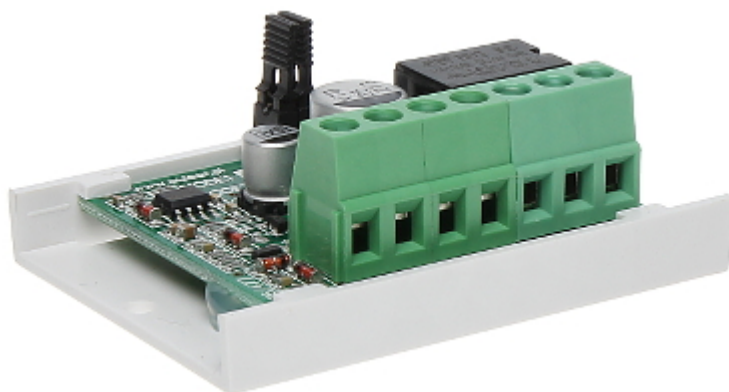

Mounting side view:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|