

Code: UQ-POE-48-24W-G

POE POWER ADAPTER **UQ-POE-48-24W-G** 24 W

Net: **18.24 EUR** Gross: **18.24 EUR**

The UQ-POE-48-24W-G is designed to powering devices using PoE technology. Power adapter is not compatible with IEEE 802.3af standard. This technology allows to run the system with only one UTP/FTP cable which transmits data and provides supplying voltage.

The device is dedicated to work in Gigabit Ethernet networks.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!



SPECIFICATION

Supported data rates:	1000 Mbps
Input voltage:	90 V ... 260 V AC @ 47 Hz ... 63 Hz
Output voltage:	48 V DC
Number of inputs:	1
Connector:	2 x RJ-45 socket 1 x IEC C6 power socket
LED indicators:	Power connection
Output power:	24 W
Protections:	• Short-circuit • Overload • Protection against electrostatic discharge
Main features:	Pin numbers for RJ-45 connector : 1/2, 3/6 - Wires to data transmission ; 4/5, 7/8 - Wires to data transmission + Power supply
Housing:	Plastic
Operation temp. / Relative humidity:	0 °C ... 40 °C / 35 % ... 95 % (non-condensing)
Weight:	0.17 kg
Dimensions:	94 x 60 x 36 mm
Manufacturer / Brand:	UBIQUITI
Guarantee:	2 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear view:



Connectors:



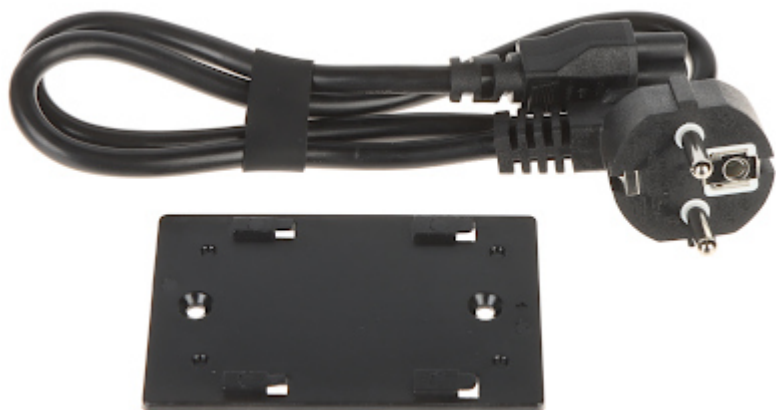

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------