

Code: POE-084832

POWER ADAPTER VIA TWISTED-PAIR CABLE **POE-084832**

Net: **32.74 EUR** Gross: **32.74 EUR**

The POE-084832 is designed to powering devices using PoE technology. This technology allows to run the system with only one UTP/FTP cable which transmits data and provides supplying voltage. Please pay attention for proper cooling conditions of the power adaptor during work!
Attention! The power cord is not included (230V AC).




SPECIFICATION

Adapter type:	Switching
Number of inputs:	8 x RJ-45 socket
Number of outputs:	8 x RJ-45 socket
Output voltage:	45.6 V ... 52.8 V DC
Input voltage:	176 V 264 V AC
Maximal output current:	8 x 0.4 A
Outputs protection:	8 x 0.5 A Glass Fuse / PTC Polymer Fuse
Protections:	Overload Overvoltage Overvoltage Short-circuit Tamper
Main features:	• FPS output - indicating power supply unit operation state: normal or failure • Supported data rates : 10 / 100 Mbps
LED indicators:	• AC input voltage presence indication • DC output voltage presence indication (AUX) • Connecting to the device • Fuse has gone indication
Weight:	3.78 kg
Dimensions:	275 x 320 x 119 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Internal view of the housing:

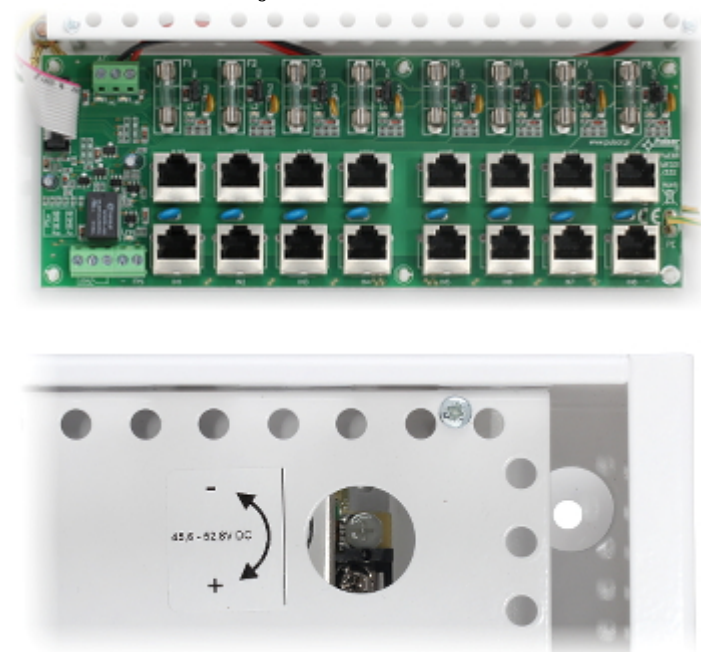

Front view:




Mounting side view:

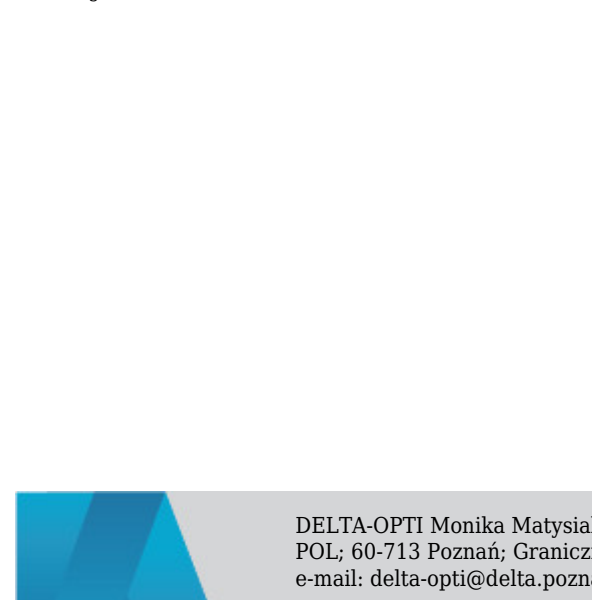



Dimensions:

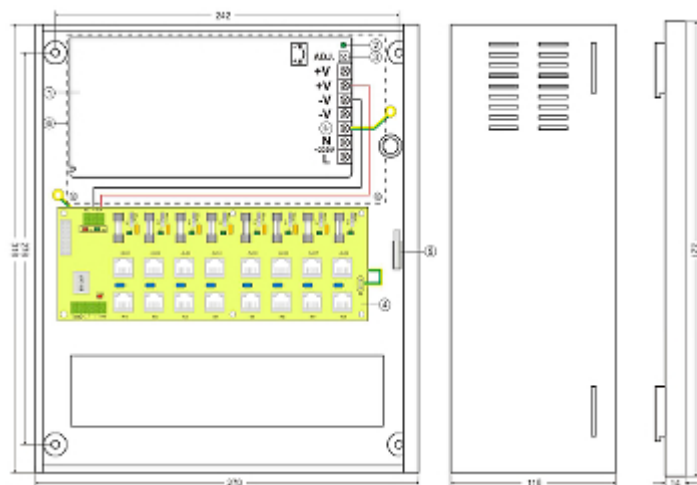

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------