

Code: TR-40VA

AC POWER SUPPLY ADAPTER **TR-40VA** SATEL

Net: **19.86 USD** Gross: **24.43 USD**

Single phase safety isolating transformer with short-circuit and thermal protection, is designed and made according to EN61558-2-6 norm.

The power adapter is intended to be used in installations, which according to the CE Directives require the use of safety isolating transformer. Transformer windings are isolated and sealed with polyurethane inside self-extinguishing housing.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!



SPECIFICATION

Adapter type:	Transforming
Power voltage:	230 ... 250 V AC
Frequency range:	47 ... 63 Hz
Output voltage:	16 V, 18 V AC
Maximal load:	2.22 A
EN norm:	EN61558-2-6
Test voltage between PRI/SEC:	AC 4kV RMS
Safety class:	II
Isolation class:	B (130°C)
"Index of Protection":	IP44
Output power:	40 VA
Application:	<ul style="list-style-type: none">• to alarm systems powering• to automatic systems• to low-voltage light installation powering
Output:	2 pcs
Dimensions:	124 x 73 x 67 mm
Weight:	1.01 kg
Manufacturer / Brand:	SATEL

DELTA-OPTI Monika Matysiak / VAT:PL5251295225 / 60-713 Poznań, ul. Graniczna 10
Tel:+48 61 864 69 60 / GSM:+48 607 60 11 66 / Fax:+48 61 864 69 65 / e-mail:shop@delta.poznan.pl
Monday-Friday: 8.00-19.00 / Saturday: 8.00-14.00

Guarantee:

2 years

PRESENTATION


Adapter connectors (after remove the cover):



Mounting side view:



In the kit:

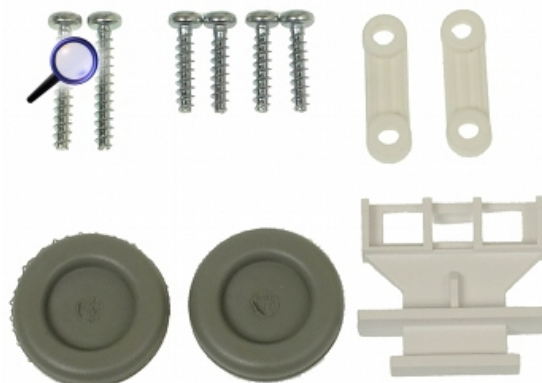

DELTA-OPTI Monika Matysiak / VAT:PL5251295225 / 60-713 Poznań, ul. Graniczna 10
Tel:+48 61 864 69 60 / GSM:+48 607 60 11 66 / Fax:+48 61 864 69 65 / e-mail:shop@delta.poznan.pl
Monday-Friday: 8.00-19.00 / Saturday: 8.00-14.00

PACKAGE

Dimensions (L x W x H): 135x80x75 mm	Package: Karton	Gross Weight: 1.05 kg
--------------------------------------	-----------------	-----------------------

