


Code: LZ-32/POL/R19

POWER SUPPLY DISTRIBUTOR **LZ-32/POL/R19**

Net: **57.59 EUR** Gross: **57.59 EUR**

The LZ-32/POL/R19 is a passive device that enables power ordered distribution from one or several higher power units.
If necessary the terminals can be connected in parallel.

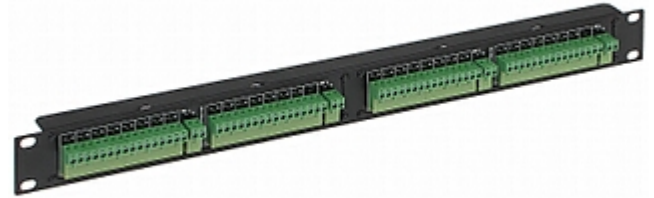

SPECIFICATION

Number of power outputs:	32 (4 x 8 outputs)
Number of power inputs:	4 (one per each 8-outputs terminal)
Maximal power voltage:	24 V DC (typical 12V)
Maximal power supply current:	5 A (for single terminal)
Max. output current for single output:	0.75 A
Protection type:	32 x 0.75 A - Polymer fuse
Power connectors type:	Input : Cable terminals Output : Cable terminals
Operation temp:	-50 °C ... 55 °C
Permissible relative humidity:	< 95 %
Housing type:	1 U Rack 19"
Weight:	0.38 kg
Dimensions:	484 x 44 x 35 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years

PRESENTATION

Front panel:



Rear view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Top view:



All terminals are separable:

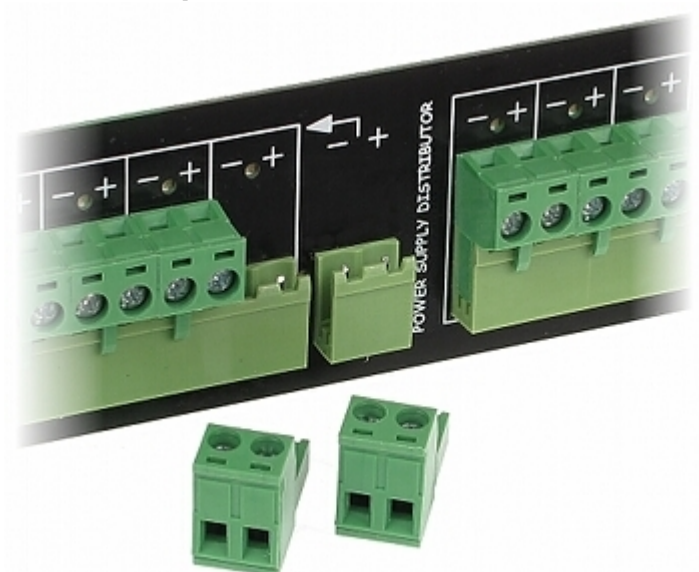

Schematic diagram of distributor application with two different voltages option:

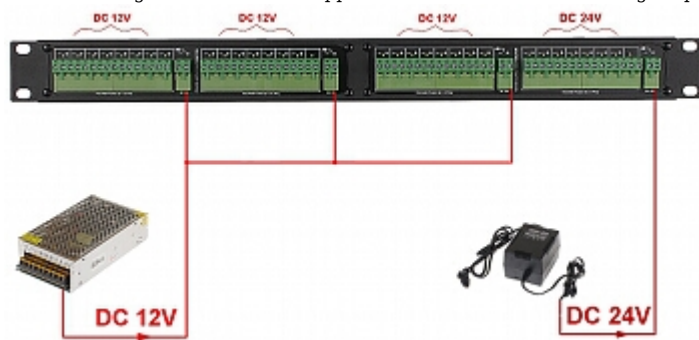

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------