


Code: PK1-24-ZN

## NORMALLY OPEN RELAY MODULE **PK1-24-ZN** DELTA

Net: **5.99 EUR** Gross: **5.99 EUR**

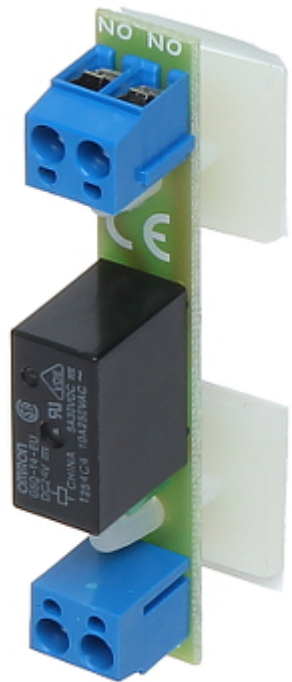

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

The self-adhesive distance elements allow to easy PCB assembly.

### SPECIFICATION

|                          |                                                                                                                                                                                 |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of relay outputs: | 1                                                                                                                                                                               |
| Power supply:            | 24 ... 45 V DC                                                                                                                                                                  |
| Current consumption:     | 17 mA / 24 V DC                                                                                                                                                                 |
| Relay maximal load:      | 5 A (max), 30 V DC / 50 V AC (max)                                                                                                                                              |
| Output:                  | NO                                                                                                                                                                              |
| Application:             | relay for electromagnetic lock/electric strike                                                                                                                                  |
| Main features:           | <ul style="list-style-type: none"><li>• Mounting with self-adhesive bases,</li><li>• LED indication,</li><li>• Protections : Overvoltage, Reverse polarity connection</li></ul> |
| Operation temp:          | -10 °C ... 40 °C                                                                                                                                                                |
| Weight:                  | 0.02 kg                                                                                                                                                                         |
| Dimensions:              | 69 x 18 x 27 mm                                                                                                                                                                 |
| Manufacturer / Brand:    | DELTA                                                                                                                                                                           |
| Guarantee:               | <b>3 years</b>                                                                                                                                                                  |



### PRESENTATION

Top view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Connectors:

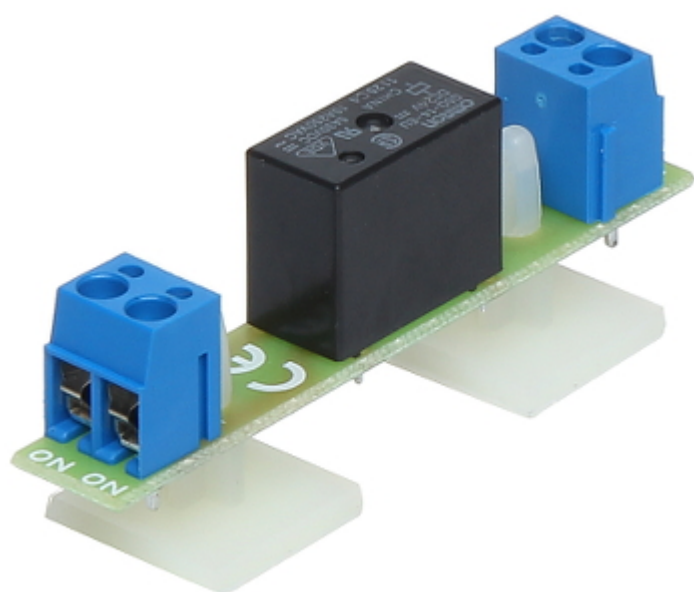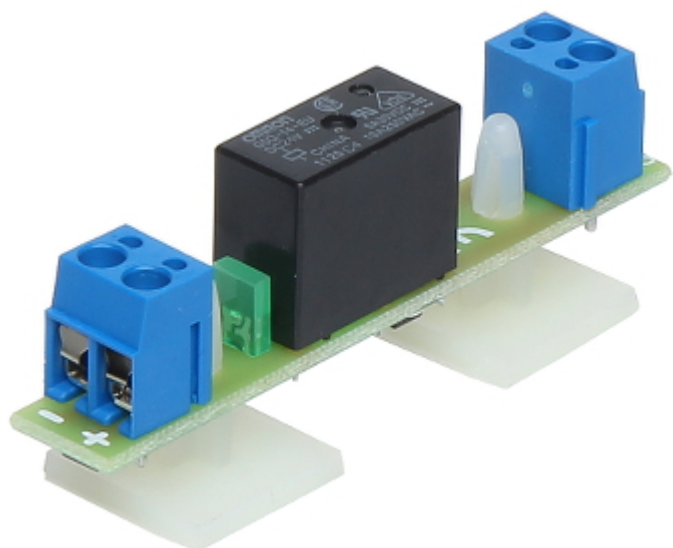

Mounting side view:

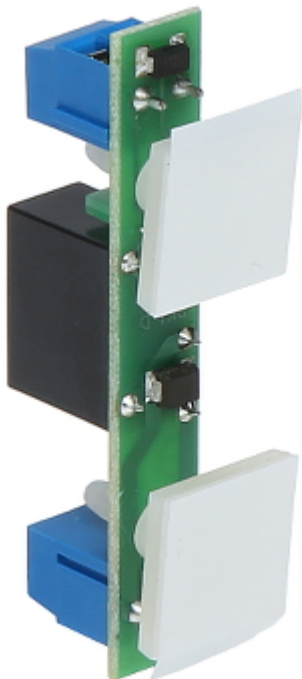

Schematic diagram:

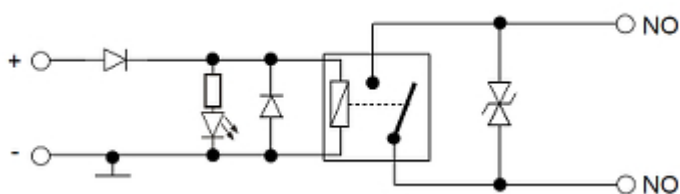

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60