

Code: DRS-24V30W-1NZ

SWITCHING ADAPTER **DRS-24V30W-1NZ** Delta Electronics

Net: **27.10 EUR** Gross: **27.10 EUR**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



SPECIFICATION

Adapter type:	Switching
Power voltage:	85 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	24 ... 28 V
Voltage tolerance:	< 2 %
Maximal load:	1.25 A
Output power:	30 W
Number of outputs:	1 pcs
Efficiency:	88 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	700000 hours Telcordia SR-332
Vibration resistance:	IEC60068-2-6, 10 ... 500 Hz max. 2 G for 60 minutes
Protections:	• Short-circuit • Overvoltage • Overload protection • Temperature
Operation temp. / Relative humidity:	-20 °C ... 70 °C / 5 % ... 95 %
Weight:	0.1 kg
Dimensions:	21 x 78 x 95 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	Delta Electronics
Guarantee:	2 years

PRESENTATION


Front panel:




Side view:



Rear panel (DIN rail installation):

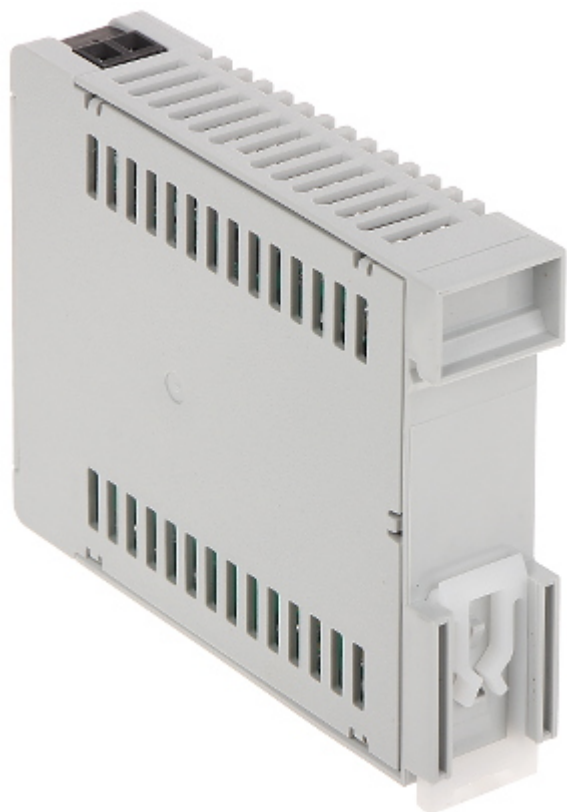

Dimensions:

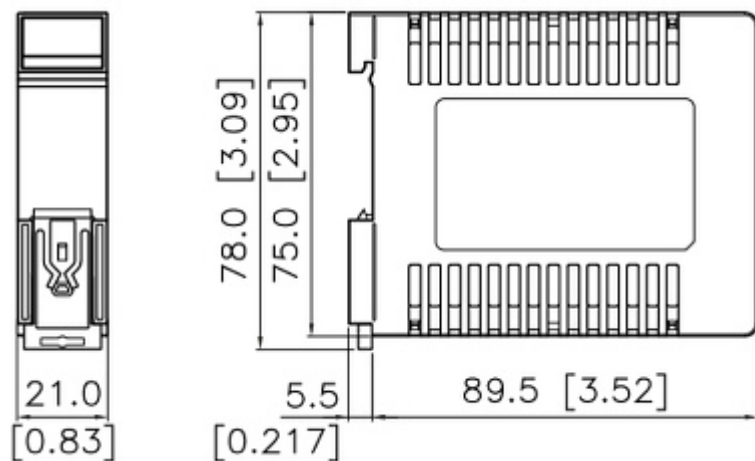

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60