

Code: DRP-024V240W-3BN

SWITCHING ADAPTER **DRP-024V240W-3BN**

Net: **59.66 EUR** Gross: **59.66 EUR**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



SPECIFICATION

Adapter type:	Switching
Power voltage:	• 3 x 320 ... 600 V AC (3 phases), • 2 x 360 ... 600 V AC (2 phases)
Output voltage:	24 V DC
Output voltage adjustment:	24 ... 28 V DC
Voltage tolerance:	± 2 %
Maximal load:	10 A
Output power:	240 W
Number of outputs:	2 pcs
Efficiency:	> 92 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	500000 hours
Vibration resistance:	IEC60068-2-6, 10 ... 500 Hz max. 3 G for 60 minutes
Protections:	• Short-circuit • Overvoltage • Overload protection
Operation temp. / Relative humidity:	-25 °C ... 75 °C / < 95 %
Weight:	0.92 kg
Dimensions:	70 x 121 x 117 mm
Guarantee:	5 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front panel:



Adapter connectors:



Rear panel (DIN rail installation):




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:



Dimensions:

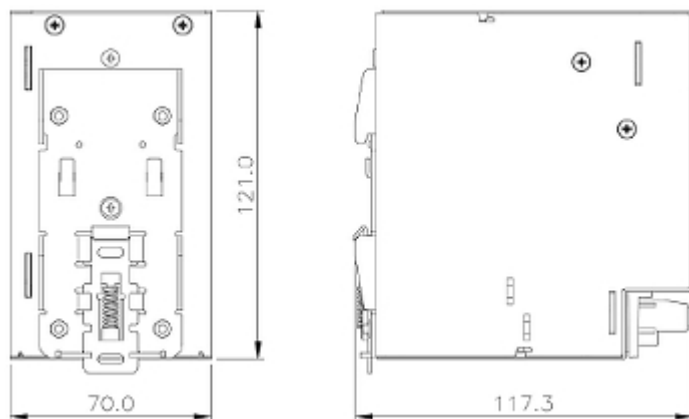

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

