

Code: DRU-24V40ABN

BUFFERED POWER SUPPLY ADAPTER **DRU-24V40ABN**

Net: **61.16 EUR** Gross: **61.16 EUR**

Buffered power adapter with DIN montage casing designed to systems supplied by 24V voltage. Please pay attention for proper cooling conditions of the power adaptor during work!



SPECIFICATION

Power voltage:	24 ... 28 V DC
Output voltage:	23 ... 28 V DC
Maximal current:	40 A
Output voltage adjustment:	—
Battery charging current:	2 A ± 1 A
Battery backup support:	24V/7.5Ah, 24V/12Ah, 24V/15Ah
Efficiency:	> 70 %
Protections:	• Overvoltage • Overload protection
Operation temp. / Relative humidity:	-20 °C ... 60 °C / 20 % ... 90 %
Housing type:	DIN
Weight:	0.38 kg
Dimensions:	50 x 121 x 117 mm
Guarantee:	5 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear panel (DIN rail installation):



Side view:



Dimensions:

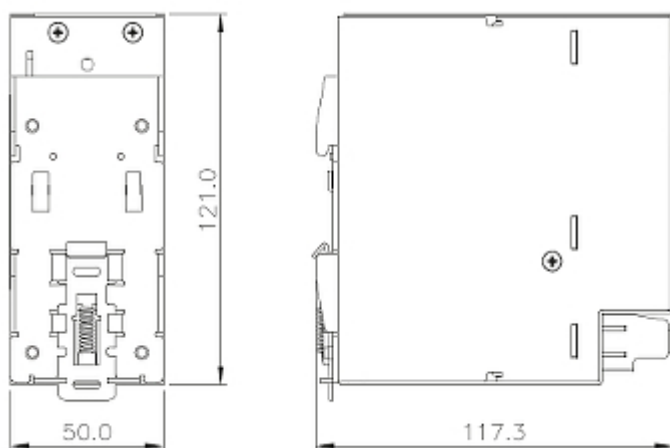

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60