

Code: DINB-27630

BUFFERED SWITCHING POWER SUPPLY ADAPTER **DINB-27630**

Net: **41.94 EUR** Gross: **41.94 EUR**

Buffered power adapter with DIN montage casing designed to systems supplied by 24V voltage. DINB-27630 is designed to mount on the DIN 35 mm rail.



SPECIFICATION


Adapter type:	Switching
Power voltage:	90 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	• 23 V ... 27.6 V DC (buffer operation) • 20 V ... 27.6 V DC (battery mode)
Maximal load:	• 3.2 A - Temperature < 30 °C • 2.3 A - Temperature = 40 °C
Battery charging current:	0.2 A
Output power:	90 W
Number of outputs:	2 pcs
Protections:	• Short-circuit • Overvoltage • Overload • Reverse polarity connection • Discharge
Adapter operation control:	• AC input voltage presence indication • DC output voltage presence indication • Battery charging indication
Housing type:	DIN
Weight:	0.41 kg
Dimensions:	122 x 93 x 50 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Adapter connectors:

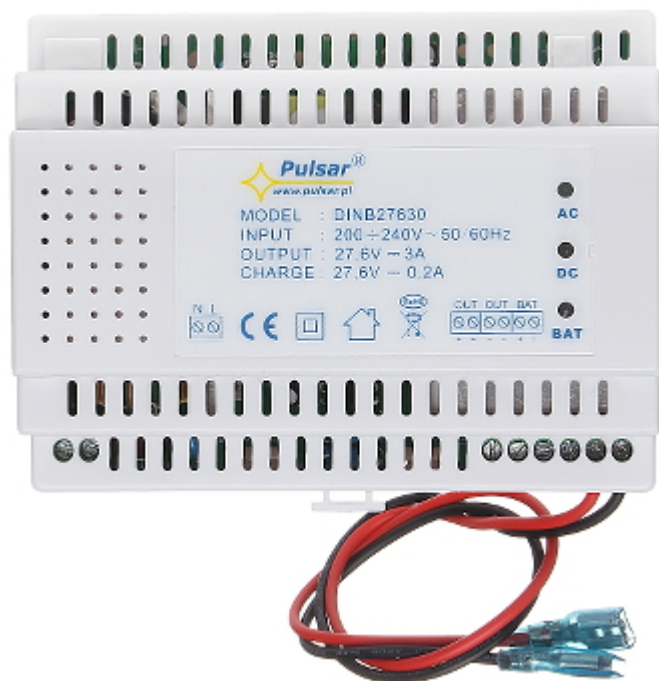

Mounting side view:



Dimensions:

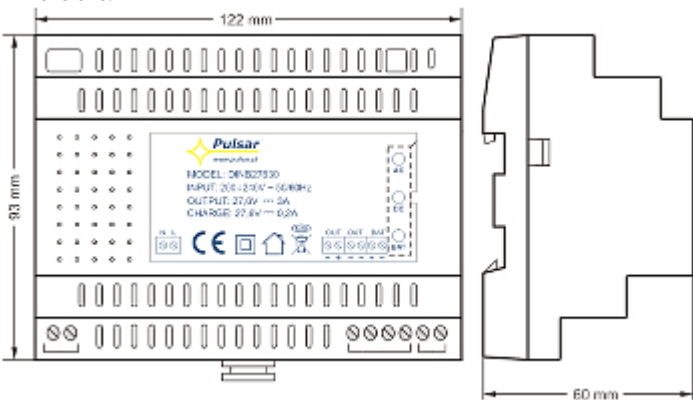

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

