

Code: DS-2CD2345FWD-I(2.8mm)

## IP CAMERA **DS-2CD2345FWD-I(2.8mm)** - 4 Mpx Hikvision

Net: **224.12 EUR** Gross: **224.12 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 2688 x 1520 (4.0 MPx). PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. Camera is according to IP67 Index of Protection norm. Powered by Darkfighter - the camera has very good sensitivity, dedicated to poor lighting conditions.



### SPECIFICATION

|                           |                                                                                                                |
|---------------------------|----------------------------------------------------------------------------------------------------------------|
| Standard:                 | TCP/IP                                                                                                         |
| Sensor:                   | 1/2.5 " Progressive Scan CMOS                                                                                  |
| Matrix size:              | 4 Mpx                                                                                                          |
| Scanning system:          | Progressive                                                                                                    |
| Resolution:               | 2688 x 1520 - 4 Mpx ,<br>2304 x 1296 - 3 Mpx ,<br>1920 x 1080 - 1080p ,<br>1280 x 720 - 720p                   |
| Lens:                     | 2.8 mm                                                                                                         |
| View angle:               | <ul style="list-style-type: none"><li>• 109 ° (manufacturer data)</li><li>• 105 ° (our tests result)</li></ul> |
| Range of IR illumination: | 30 m                                                                                                           |
| S/N ratio:                | > 50 dB                                                                                                        |
| RS-485 interface:         | —                                                                                                              |
| Memory card slot:         | Micro SD memory cards up to 128GB support (possible local recording)                                           |
| Image compression method: | H.265+ / H.265 / H.264+ / H.264 / MJPEG                                                                        |
| Alarm inputs / outputs:   | —                                                                                                              |
| Audio:                    | —                                                                                                              |
| Bitrate:                  | 32 kb/s ... 16384 kb/s                                                                                         |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main stream frame rate:        | 25 fps @ 4 Mpx                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Network interface:             | 10/100 Base-T (RJ-45)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Network protocols:             | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv6, Bonjour                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| WEB Server:                    | Built-in                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Max. number of on-line users:  | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| ONVIF:                         | 16.12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Main features:                 | <ul style="list-style-type: none"> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• EXIR - high-efficiency infrared LEDs technology, which evenly covers the whole plan of both central vantage points of the scene as well as the corners</li> <li>• BLC - Back Light Compensation</li> <li>• HLC - High Light Compensation (spot)</li> <li>• Anti-Flicker - The technology eliminates the tiring eyes flickering image effect</li> <li>• Possibility to change the resolution, quality and bit rate</li> <li>• ICR - Movable InfraRed filter</li> <li>• Motion Detection</li> <li>• Configurable Privacy Zones</li> <li>• Mirror - Mirror image</li> <li>• Intelligent Image Analysis : crossing the line (tripwire), intrusion, abandoned/missing object, scene changing, face detection</li> </ul> |
| Mobile phones support:         | Port no.: 8000 or access by a cloud (P2P)<br>• Android: Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a><br>• iOS (iPhone): Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Default IP address:            | 192.168.1.64                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Default admin user / password: | admin / -<br>The administrator password should be set at the first start                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Web browser access ports:      | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| PC client access ports:        | Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Mobile client access ports:    | 8000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Port ONVIF:                    | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| RTSP URL:                      | <ul style="list-style-type: none"> <li>• Main stream<br/>rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization<br/>rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization</li> <li>• Sub stream<br/>rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization<br/>rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Power supply:                  | <ul style="list-style-type: none"> <li>• PoE (802.3af),</li> <li>• 12 V DC / 500 mA</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Power consumption:             | $\leq 7.5 \text{ W @ PoE (802.3af)}$<br>$\leq 6 \text{ W @ 12 V DC}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Housing:                       | Dome, Metal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Color:                         | White                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| "Index of Protection":         | IP67                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Vandal-proof:                  | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Operation temp:                | -30 °C ... 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimensions:                    | Ø 127 x 96 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Weight:                        | 0.62 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Supported languages:           | Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Vietnamese, Italian                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



|                       |                |
|-----------------------|----------------|
| Manufacturer / Brand: | Hikvision      |
| SAP Code:             | 311303000      |
| Guarantee:            | <b>3 years</b> |

## PRESENTATION

Camera is out from clamping ring:



Memory card slot:




Mounting side view:





Dimensions:

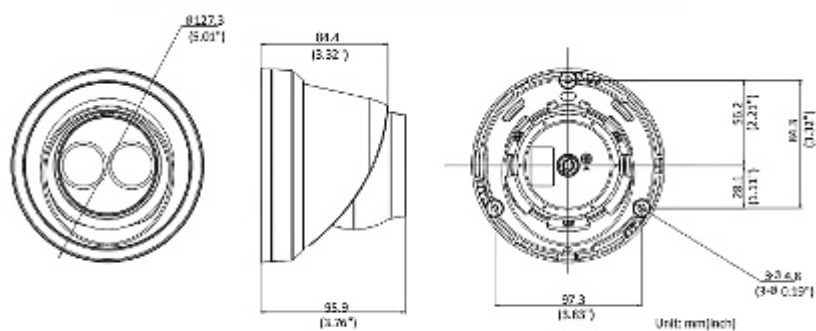

In the kit:



## OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

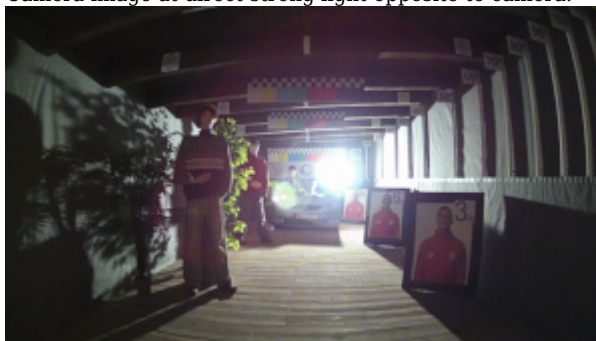

## OUR OPINIONS



- The camera is equipped with a sensor with very high sensitivity, dedicated to work in poor light conditions.

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|