

Code: MC1/SHOCK-WE

WIRELESS MAGNETIC CONTACT WITH SHOCK DETECTOR **MC1/SHOCK-WE** PYRONIX

Net: **67.60 EUR** Gross: **67.60 EUR**

The MC1/SHOCK-WE wireless detector is intended for installation in locations where a shock detector is required or a combination of this detector with a magnetic contact, such as walls, ceilings, door and window frames.
The device communicates with alarm control panel wirelessly via Pyronix protocol.



SPECIFICATION

Support:	Wireless alarm systems PYRONIX Enforcer
Detection:	• Opening the door or window, • Vibrations, Shocks, • Tamper detection - opening the enclosure
Alarm signaling:	Signal to control panel
Frequency range:	868 MHz Pyronix protocol
Radio communication range (at open area):	max. 1600 m
Alarm inputs:	✓
Battery:	3 V CR123A (included)
Backup time:	> 2 years
Environment class:	II
Protection class (Grade):	Grade 2
Main features:	• Bi-directional encrypted radio communication • 2 wired inputs and 1 tamper input • The radio signal level LED indicator
Operation temp:	-10 °C ... 40 °C
Weight:	0.08 kg
Dimensions:	• 27 x 132 x 28 mm - Reed switch • 15 x 50 x 14 mm - Magnet

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Manufacturer / Brand:	PYRONIX
SAP Code:	361300057
Guarantee:	2 years

PRESENTATION

Front view:



Internal view of the housing:

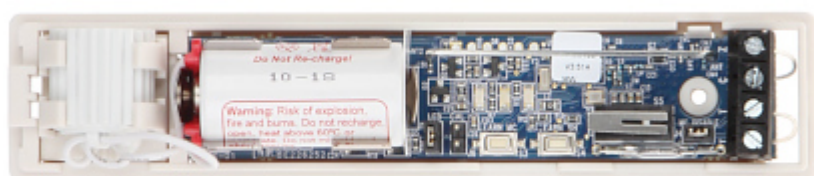

Mounting side view:





In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60