

Code: DS-PDMCK-EG2-WE

# WIRELESS MAGNETIC CONTACT WITH SHOCK DETECTOR AX PRO **DS-PDMCK-EG2-WE** Hikvision

Net: **57.84 EUR** Gross: **57.84 EUR**

The DS-PDMCK-EG2-WE wireless detector is intended for installation in locations where a shock detector is required or a combination of this detector with a magnetic contact, such as walls, ceilings, door and window frames.

The DS-PDMCK-EG2-WE supports the other devices compatible with wireless HIKVISION AX PRO system.



## SPECIFICATION

|                                           |                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Support:                                  | HIKVISION AX PRO                                                                                                                                                                                                                                                                                                                                 |
| Detection:                                | <ul style="list-style-type: none"><li>• Opening the door or window,</li><li>• Vibrations, Shocks, tilt &lt; 25 °</li></ul>                                                                                                                                                                                                                       |
| Break distance:                           | ~ 43 mm                                                                                                                                                                                                                                                                                                                                          |
| Alarm signaling:                          | Signal to control panel                                                                                                                                                                                                                                                                                                                          |
| Frequency range:                          | 868 MHz - Tri-X Wireless                                                                                                                                                                                                                                                                                                                         |
| Radio communication range (at open area): | max. 1600 m                                                                                                                                                                                                                                                                                                                                      |
| Alarm inputs:                             | 2 pcs NO/NC                                                                                                                                                                                                                                                                                                                                      |
| Power supply:                             | 1 x battery CR123A 3 V (included)                                                                                                                                                                                                                                                                                                                |
| Backup time:                              | ~ 3 years                                                                                                                                                                                                                                                                                                                                        |
| Current consumption:                      | max. 70 mA                                                                                                                                                                                                                                                                                                                                       |
| Main features:                            | <ul style="list-style-type: none"><li>• Tamper protections</li><li>• Signal indicator</li><li>• LED indication</li><li>• Digital detector</li><li>• Transmission encoding - 128-bit AES encryption</li><li>• Bidirectional communication</li><li>• Frequency hopping against jamming for reliable transmission</li><li>• Input : NO/NC</li></ul> |

|                            |                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Compliance with standards: | EN50131-1:2006+A1:2009, EN50131-1:2006+A2:2017<br>EN50131-2-8:2016<br>EN50131-2-6:2008<br>EN 50131-5-3:2017            |
| Environment class:         | II                                                                                                                     |
| Operation temp:            | -10 °C ... 55 °C                                                                                                       |
| Color:                     | White                                                                                                                  |
| Weight:                    | <ul style="list-style-type: none"> <li>• 0.046 kg - Transmitter</li> <li>• 0.012 kg - Magnet</li> </ul>                |
| Dimensions:                | <ul style="list-style-type: none"> <li>• 22 x 103 x 23 mm - Transmitter</li> <li>• 13 x 34 x 11 mm - Magnet</li> </ul> |
| Country of origin:         | China                                                                                                                  |
| SAP Code:                  | 314300097                                                                                                              |
| Manufacturer / Brand:      | Hikvision                                                                                                              |
| Guarantee:                 | 2 years                                                                                                                |

## PRESENTATION

Front view:



Internal view of the housing:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Mounting side view:



In the kit:

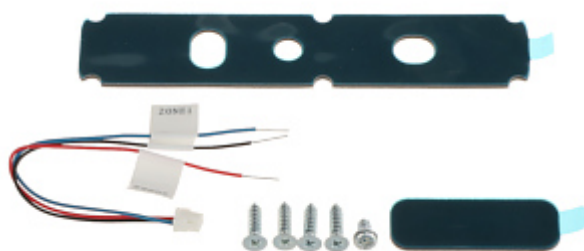

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|