

Code: HECKERMANN-GUARDIAN-I

ALARM KIT **HECKERMANN-GUARDIAN-I**

Net: **61.47 EUR** Gross: **61.47 EUR**

The HECKERMANN-GUARDIAN-I alarm set is an ideal solution for people looking for a simple and reliable alarm system for home applications. Thanks to wireless communication between the system components and its simple and intuitive configuration by phone, SMS or via a mobile application, there is no need to call the installer to install the devices.

The set includes: Guardian I wireless alarm control panel, wireless motion detector, wireless reed switch, two wireless keyfobs and a wired alarm siren.



SPECIFICATION

Number of supported wireless devices:	max. 99 pcs
Number of supported remote control keyfobs:	max. 8 pcs, In the kit : 2 pcs
The RFID cards/keyfobs support:	—
Number of supported wireless sirens:	—
PIR detectors included:	1 pcs, Wireless
Magnetic contact included:	1 pcs, Wireless
Enclosure included:	✓
Keyboard included:	✓
Expander included :	—
Wireless:	433 MHz
Zones:	99 (wireless zones) + 7 (wired zones)
Timers:	✓
Users + admins:	6
Default administrator password:	6666
Default user password:	1234
Built-in modules:	GSM
Access from PC:	—
Mobile phones support:	Remote control of the control panel via SMS
Main features:	• Bidirectional communication, • SMS notification about alarm and power failure, • LED indication, • LCD display, • Built-in alarm siren - 100 dB, • Alarm mute function
Power supply:	• 12 V DC / 1 A (power adapter included) • Built-in battery that maintains the control panel operation during a power failure : 3.7 V / 500 mAh

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Housing:	Plastic
Color:	White
Operation temp:	-10 °C ... 60 °C
Weight:	0.34 kg
Dimensions:	180 x 135 x 32 mm

MAGNETIC CONTACT:

Detection:	Opening the door or window
Alarm signaling:	Signal to control panel
Frequency range:	433 MHz
Alarm inputs:	—
Main features:	Tamper protections
Battery:	1 x 12V, type A23 battery (included)
Weight:	• 0.028 kg - Transmitter • 0.012 kg - Magnet
Dimensions:	• 65 x 38 x 18 mm - Transmitter • 65 x 14 x 14 mm - Magnet

PIR DETECTOR:

Support:	Heckermann
Battery power supply:	9 V 6F22 (included)
Frequency range:	433 MHz
Radio communication range (at open area):	max. 30 m
Recommended installation height:	2.2 m
Detection angle / Detection range:	110 ° / 12 m (basic lens)
Pet immunity:	—
Main features:	• Code 1527 data encryption • Interchangeable Fresnel lenses • Temperature compensation • Tamper detection - opening the enclosure
Weight:	0.11 kg
Dimensions:	60 x 110 x 47 mm

REMOTE CONTROL:

Frequency band:	433 MHz
Main features:	• LED indication • One-touch action buttons : arm, disarm, silencing the alarm, SOS
Battery:	A27 12 V (included)
Weight:	0.024 kg
Dimensions:	55 x 30 x 14 mm

INDOOR SIREN:

Sound pressure level:	120 dB
Color:	Red
Operation temp:	-10 °C ... 40 °C
Weight:	0.08 kg
Dimensions:	73 x 123 x 47 mm

General information:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	Heckermann
Guarantee:	2 years

PRESENTATION

Alarm control panel:



Front panel:






Rear view:





Place for battery:

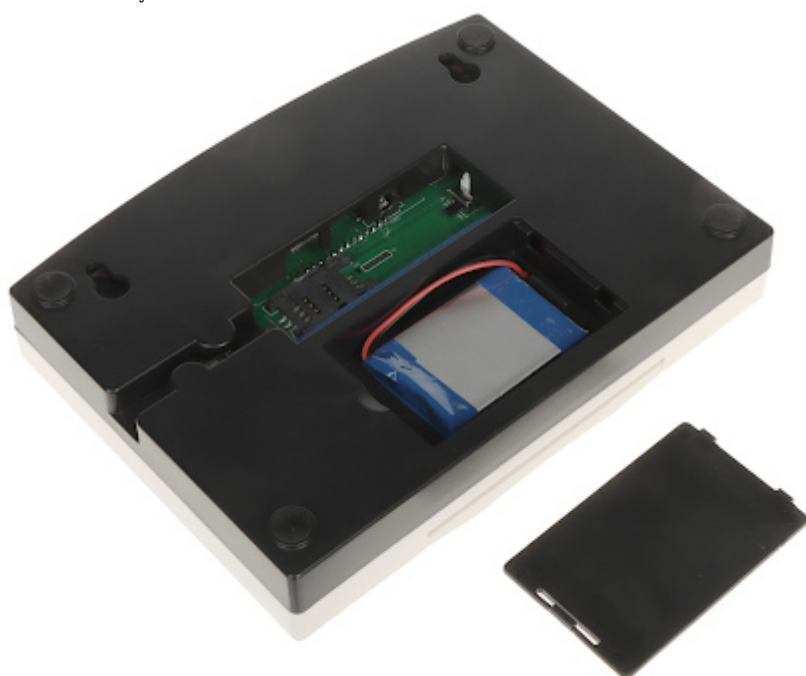


PIR detector:






Signaling device:



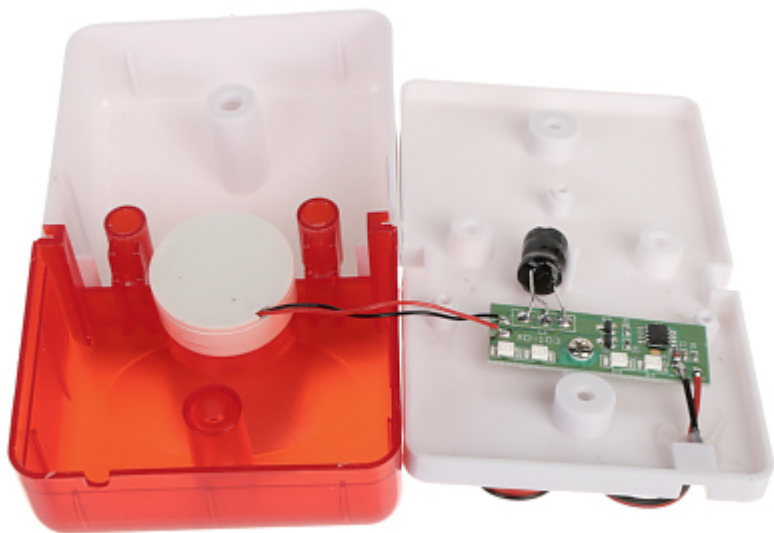

MAGNETIC CONTACT:

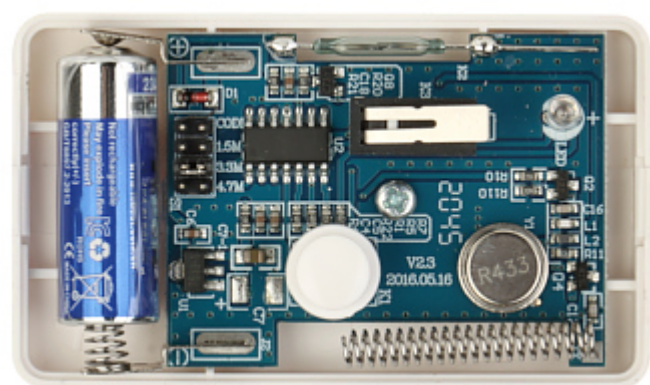

Remote control:



