

Code: GEMINI-AH2D-27

AHD, PAL VANDALPROOF CAMERA **GEMINI-AH2D-27** - 1080p 2.8 ... 12 mm

Net: **36.33 EUR** Gross: **36.33 EUR**

Megapixel camera with 1/2.8" Sony CMOS sensor and AHD (Analog High Definition) / PAL.

The AHD interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Additionally camera has a possibility to select output signal standard between AHD and PAL. The change of the AHD / PAL standard is done with joystick by holding it tilted to the right or to the left for approx. 3 seconds, without going into the OSD.



SPECIFICATION

Standard:	AHD, PAL
Sensor:	1/2.8 " Sony CMOS IMX222
Digital Image Processor:	Nextchip NVP2441H
Matrix size:	2.0 Mpx
Resolution:	1920 x 1080 - 1080p AHD-H 960 x 576 - PAL
Video output:	1 Vpp 75 Ω, AHD, PAL
Lens:	2.8 ... 12 mm, 2 Mpx, Auto Iris DC
View angle:	• 85 ° ... 24 ° (manufacturer data) • 90 ° ... 31 ° (our tests result)
S/N ratio:	> 50 dB
IR illuminator power adjustment:	Automatic
Range of IR illumination:	15 m
OSD menu:	✓
Main features:	• ICR - Movable InfraRed filter • Day/Night mode (color/b&w/auto) • WB - White Balance (ATW/AWB/manual/indoor/outdoor) • Sense-UP - (Slow Shutter) - Increase the sensor sensitivity max. x 30 • D-WDR - Wide Dynamic Range • 2D-DNR / 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • Motion Detection - max. 4 zones • Privacy zones - max. 4 • BLC - configurable Back Light Compensation • HSBL - High Light Compensation (spot) • Mirror - Mirror image • image "freeze" • Sharpness - sharper image outlines • Monitor type correction - LCD/CRT

Power supply:	12 V DC / 240 mA
Housing:	Dome - Metal
Vandal-proof:	✓
Color:	White
"Index of Protection":	IP66
Operation temp:	-20 °C ... 55 °C
Weight:	1.015 kg
Dimensions:	Ø 149 x 112 mm
Supported languages:	English, Chinese Traditional, Chinese Simplified, French, Spanish, Dutch, German, Polish, Portuguese, Russian, Turkish, Italian
Manufacturer / Brand:	GEMINI
Guarantee:	2 years

PRESENTATION

Camera view after remove the Dome cover:



The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu. Changing the signal to the NTSC in the camera causes loss of image in connected AHD recorder:



Configuration


- 1) Turn on the power
- 2) Move the joystick left or right, setting the appropriate resolution
- 3) Move the joystick down by 5 s, setting the PAL / NTSC

The PAL and NTSC standard is set regardless of the resolution.

Mounting side view:



In the kit:

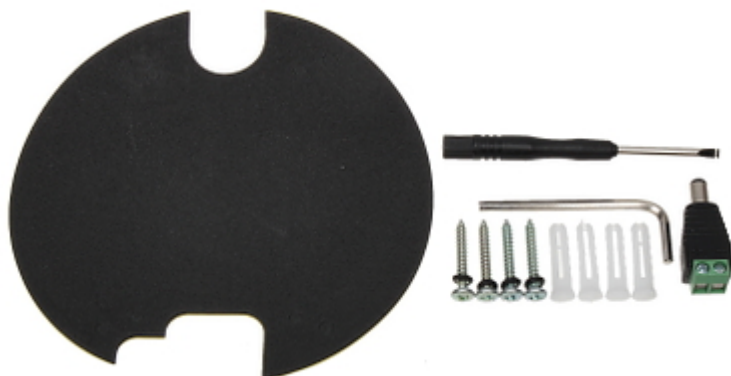

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------