

Code: DS-2CE56D0T-IT3(2.8mm)

HD-TVI CAMERA **DS-2CE56D0T-IT3(2.8mm)** - 1080p Hikvision

Net: **49.29 EUR** Gross: **49.29 EUR**

Megapixel camera with Progressive Scan CMOS sensor and HD-TVI (High Definition Transport Video Interface).

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to 1080p. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Housing construction allows to mount the camera to the ceiling and the wall (image is right oriented in both cases).



SPECIFICATION

Standard:	HD-TVI
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Range of IR illumination:	40 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 mm
View angle:	• 103 ° (manufacturer data) • 100 ° (our tests result)
Video output:	1 Vpp / 75 Ω - HD-TVI, BNC socket
Main features:	• EXIR - high-efficiency infrared LEDs technology, which evenly covers the whole plan of both central vantage points of the scene as well as the corners • ICR - Movable InfraRed filter • AGC - Automatic Gain Control • BLC - Back Light Compensation • Auto White Balance
OSD menu:	—
Power supply:	12 V DC / 330 mA
Power consumption:	≤ 4 W
Housing:	Dome - Plastic
Color:	White
"Index of Protection":	IP66

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation temp:	-20 °C ... 45 °C
Weight:	0.23 kg
Dimensions:	Ø 110 x 93 mm
Supported languages:	—
Country of origin:	China
SAP Code:	300607140
Manufacturer / Brand:	Hikvision
Guarantee:	3 years

PRESENTATION


Camera is out from clamping ring:




Mounting side view:



Mounting side view:

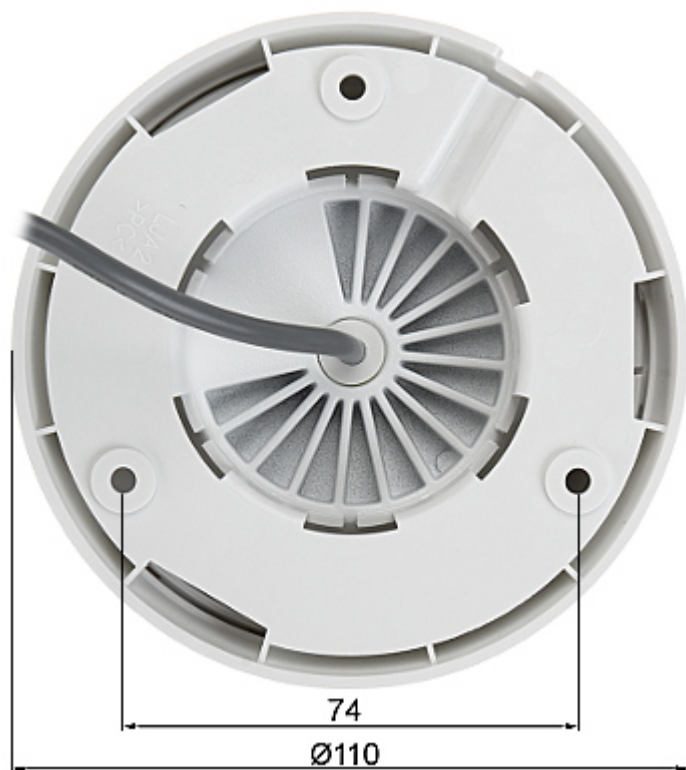

Camera dimensions:

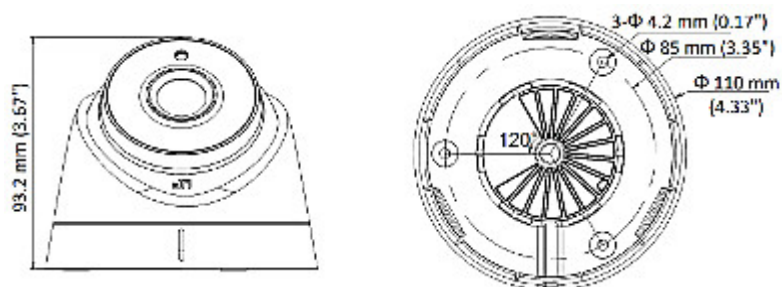

In the kit:



OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

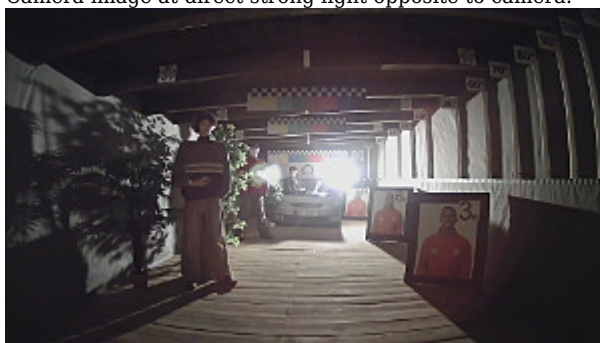

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------