

Code: DS-2CE56D0T-IRMM(3.6MM)

HD-TVI CAMERA **DS-2CE56D0T-IRMM(3.6MM)** - 1080p Hikvision

Net: **34.43 EUR** Gross: **34.43 EUR**

Megapixel camera with Progressive Scan CMOS sensor and HD-TVI (High Definition Transport Video Interface).

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to 1080p. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.



SPECIFICATION

Standard:	HD-TVI
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Lens:	3.6 mm
View angle:	• 82 ° (manufacturer data) • 76 ° (our tests result)
IR illuminator support:	ICR - Movable InfraRed filter
S/N ratio:	> 62 dB
Video output:	1 Vpp / 75 Ω - HD-TVI, BNC socket
Main features:	• ICR - Movable InfraRed filter • AGC - Automatic Gain Control • BLC - Back Light Compensation • Auto White Balance
OSD menu:	—
Power supply:	12 V DC / 330 mA
Power consumption:	≤ 4 W
Housing:	Dome, Plastic
Color:	White
Vandal-proof:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

"Index of Protection":	IP66
Operation temp:	-20 °C ... 45 °C
Weight:	0.14 kg
Dimensions:	Ø 98 x 66 mm
Manufacturer / Brand:	Hikvision
SAP Code:	300606864
Guarantee:	3 years

PRESENTATION


Camera is out from clamping ring:



Mounting side view:



Camera dimensions:

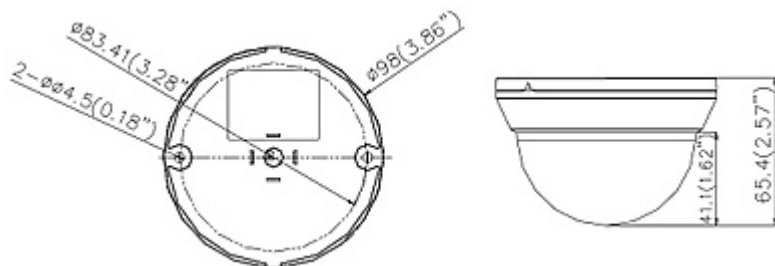

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------