


Code: ASC1202B-D

ACCESS CONTROLLER **ASC1202B-D** DAHUA

The ASC1202B-D controller is intended to use in access control systems based on electrical control of door opening.

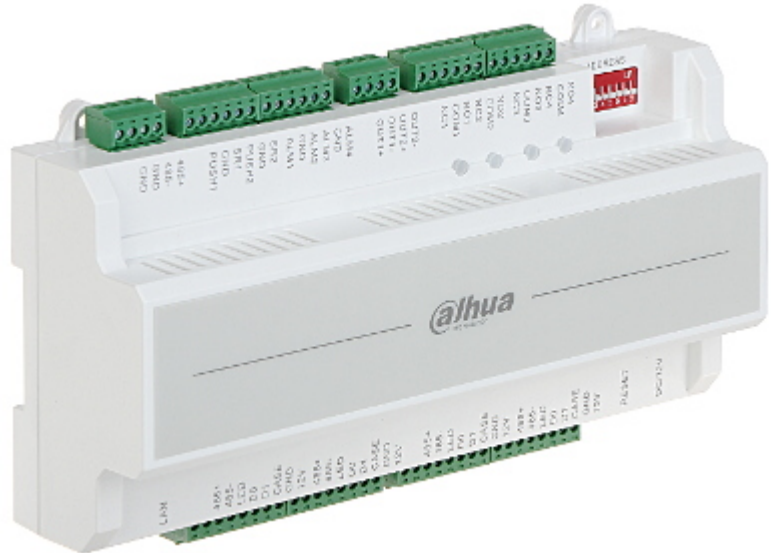

Number of served transitions:	2 (two-way)
Support:	DAHUA
Number of supported readers:	4 pcs
Battery backup support:	—
Output lines:	6 pcs (4 pcs Relay)
Communication:	<ul style="list-style-type: none"> • RS-485, • Ethernet, • Wiegand 34/26
Power supply:	9 ... 15 V / 500 mA DC
Main features:	<ul style="list-style-type: none"> • 100000 indexed users • History of 150000 events • Remote programming from PC • Watchdog built-in • Possibility to mount on a wall, or on the DIN TS-35 rail
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Weight:	0.39 kg
Dimensions:	206 x 117 x 51 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years