


Code: HPSPDC-12V16X1A

## SWITCHING ADAPTER **HPSPDC-12V16X1A** PULSAR

Power adapter is equipped with aesthetic, solidly made metal casing box. Power adapter output voltage is DC 12V. It allows to connect up to 16 devices. Maximal load for the one output is 1A, but you should remember the total load for all outputs must be lower than 15A. Each output is protected independently with glass fuse.

Please pay attention for proper cooling conditions of the power adaptor during work!

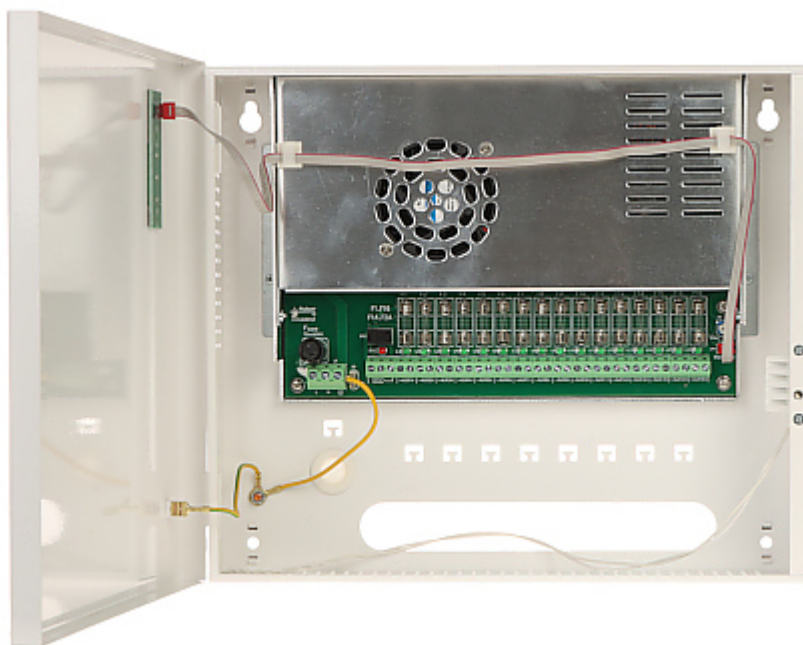

|                                        |                                                                                                                                     |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Adapter type:                          | Switching                                                                                                                           |
| Output voltage:                        | 12 V DC                                                                                                                             |
| Output voltage adjustment:             | 12 V ... 15 V - By potentiometer                                                                                                    |
| Max. output current (total):           | 15 A                                                                                                                                |
| Max. output current for single output: | 1 A                                                                                                                                 |
| Outputs protection:                    | 1 A Glass Fuse                                                                                                                      |
| LED indication:                        | ✓                                                                                                                                   |
| Protection:                            | <ul style="list-style-type: none"> <li>• Short-circuit</li> <li>• Overload</li> <li>• Overvoltage</li> <li>• Overvoltage</li> </ul> |
| Input voltage:                         | 200 ... 240 V, 50 / 60 Hz                                                                                                           |
| Power:                                 | 180 W (max)                                                                                                                         |
| Number of outputs:                     | 16                                                                                                                                  |
| Connector type:                        | Cable terminals                                                                                                                     |

|                                      |                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main features:                       | <ul style="list-style-type: none"><li>• Efficiency : 85 %</li><li>• LED indication</li><li>• FPS output - indicating power supply unit operation state: normal or failure</li><li>• Tamper detection - opening the enclosure</li><li>• Protection class EN 62368-1 : I</li><li>• "Index of Protection" : IP20</li></ul> |
| Housing type:                        | Metal, wall-mounted                                                                                                                                                                                                                                                                                                     |
| Key closed:                          | —                                                                                                                                                                                                                                                                                                                       |
| Operation temp. / Relative humidity: | -10 °C ... 40 °C / 20 ... 90 %                                                                                                                                                                                                                                                                                          |
| Weight:                              | 2.64 kg                                                                                                                                                                                                                                                                                                                 |
| Dimensions:                          | 305 x 262 x 85 mm                                                                                                                                                                                                                                                                                                       |
| Manufacturer / Brand:                | PULSAR                                                                                                                                                                                                                                                                                                                  |
| Guarantee:                           | 2 years                                                                                                                                                                                                                                                                                                                 |