


Code: SW-9108

MultiBAS **SW-9108** ProfiSETT TELMOR

The MultiBAS devices from TELKOM-TELMOR are a combination of an amplifier and a multiswitch.

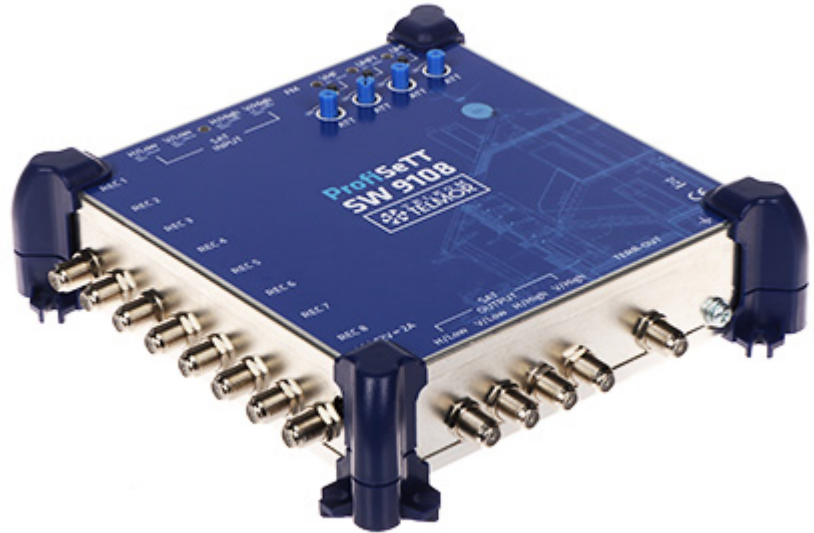

Frequency range:	<ul style="list-style-type: none"> • 87 MHz ... 112 MHz - FM, • 170 MHz ... 240 MHz - VHF / DAB, • 470 MHz ... 694 MHz - UHF1, UHF2 • 950 MHz ... 2150 MHz - SAT
Gain :	<ul style="list-style-type: none"> • 15 dB @ FM • 15 dB @ VHF / DAB • 25 dB @ UHF1, UHF2 • -2 dB ... 6 dB @ SAT
Inputs:	8 pcs
Outputs:	<ul style="list-style-type: none"> • 8 pcs • 5 pcs (Loop through)
Pre-amplifiers powering:	12 V DC : 50 mA / VHF/DAB, UHF1, UHF2 input
Gain adjustment:	-20 dB ... 0 dB (for single line)
Maximal output level DIN45004B:	<ul style="list-style-type: none"> > 95 dBμV - FM > 95 dBμV - VHF > 95 dBμV - UHF1, UHF2 > 94 dBμV - SAT
Return loss:	> 10 dB
S/N ratio:	<ul style="list-style-type: none"> < 17 dB - FM < 10 dB - VHF < 12 dB - UHF1, UHF2

Main features:	<ul style="list-style-type: none">• ProfiSETT product series• DVB-T, DVB-T2, DAB, DAB+ compliance• Dual UHF input for installations requiring signal reception from different directions• 5G Protected Technology• Continuous gain adjustment• High isolation between inputs : > 20 dB• Gain adjustment• High level of shielding
Power supply:	12 V DC / 2 A (power adapter included)
Power consumption:	24 W (max)
Operation temp:	0 °C ... 50 °C
Weight:	0.63 kg
Dimensions:	192 x 185 x 50 mm
Manufacturer / Brand:	TELMOR
Guarantee:	2 years