



# User Manual

Code: DH-HAC-LC1220TP-TH-0

AHD, HD-CVI, HD-TVI, PAL CAMERA **DH-HAC-LC1220TP-TH-0** - 1080p 2.8 mm DAHUA

## Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

### Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

**Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.**

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

### Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

Megapixel camera with 1/2.9" CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals.

Attention! The camera default setting is HD-CVI standard. To change the camera standard you need use the PFM820 controller, available separately.

Camera is according to IP67 Index of Protection norm. The 3-Axis integrated camera bracket has a regulation in all three planes, which allows to turn the camera to any direction.

In addition to the standard functions, the device has also been adapted to work with advanced monitoring systems of the DAHUA brand that meet the objectives of the Internet of Things concept (IoT). The camera has a built-in thermometer and hygrometer. Readings from the sensors are sent together with the HD-CVI signal to the recorder via a coaxial cable. In addition, it is possible to display the reading from the sensors in the camera image (as OSD image). The recorder has the option of displaying the collected data in real time on the screen, putting them on the camera image, displaying the statistics, and also programming the alarm states in the case of eg opening the door, smoke detection or a rapid temperature increase.

**Attention!** The IoT functions work only with the recorders of the DHI-XVR7xxx-4KL series.



Standard:	AHD, HD-CVI, HD-TVI, PAL
Sensor:	1/2.9 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	<ul style="list-style-type: none"> <li>• 1920 x 1080 - 1080p - AHD, HD-CVI, HD-TVI</li> <li>• 1280 x 720 - 720p - AHD, HD-CVI, HD-TVI</li> <li>• 960 x 576 - 960H PAL</li> </ul>
Lens:	2.8 mm
View angle:	<ul style="list-style-type: none"> <li>• 104 ° (manufacturer data)</li> <li>• 101 ° (our tests result)</li> </ul>
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Video output:	AHD / HD-CVI / HD-TVI / PAL, 1 Vpp / 75 Ω
S/N ratio:	> 65 dB
OSD menu:	✓

Main features:	<ul style="list-style-type: none"> <li>• Thermometer built-in</li> <li>• Built-in hygrometer</li> <li>• Displaying the reading from the sensors in the camera image (as OSD image)</li> <li>• Cooperation with Dahua devices working in the concept of the Internet of Things (IoT)</li> <li>• D-WDR - Wide Dynamic Range</li> <li>• 2D-DNR - Digital Noise Reduction</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• ICR - Movable InfraRed filter</li> <li>• Sharpness - sharper image outlines</li> <li>• AGC - Automatic Gain Control</li> <li>• Privacy zones</li> <li>• Mirror - Mirror image</li> <li>• Auto White Balance</li> </ul>
Power supply:	12 V DC / 280 mA
Power consumption:	≤ 3.4 W
Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP67
Operation temp:	-40 °C ... 60 °C
Weight:	0.4 kg
Dimensions:	176 x 85 x 75 mm
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

Front view:




Side view:




Bottom view:



Camera mounting side view:

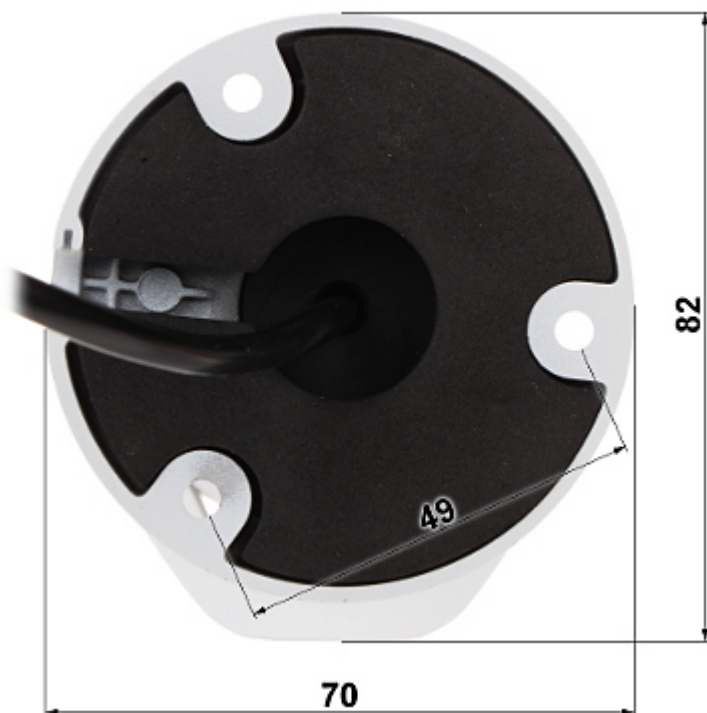

Dimensions:

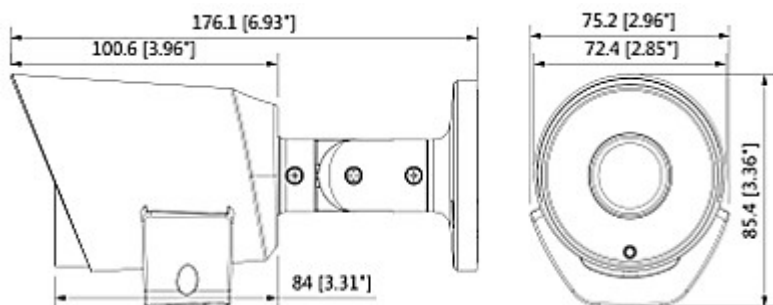

In the kit:



# User Manual

Code: DH-HAC-LC1220TP-TH-0

AHD, HD-CVI, HD-TVI, PAL CAMERA **DH-HAC-LC1220TP-TH-0** - 1080p 2.8 mm DAHUA



See the possibilities of using the Internet of Things (IoT) concept:  
:

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------