



User Manual

Code: P5AE-PV

IP SPEED DOME CAMERA OUTDOOR **P5AE-PV** Picco A2 Wi-Fi - 5 Mpx 4 mm DAHUA

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

Camera equipped with Full-Color technology, which allows you to obtain a clear color image even at night and has the function of active audio-visual deterrence in combination with AI artificial intelligence functions.

The device is equipped with Smart Dual Light technology, thanks to which the user has a choice of white light mode and IR (infrared) mode. When Smart Dual Light is active, the white light will turn on automatically only when an object is detected in the monitored area, which effectively improves the image quality.



| | |
|------------------------------------|---|
| Standard: | IP |
| Resolution: | 2560 x 1920 - 5 Mpx , 2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 1080p , 1280 x 720 - 720p |
| Sensor: | 1/2.8 " Progressive Scan CMOS |
| Lens: | 4 mm |
| View angle: | 80 ° |
| Optical zoom: | — |
| Digital zoom: | — |
| Range of IR illumination: | 30 m |
| White light LED illuminator range: | 30 m |
| Video output: | — |
| Rotation speed (manual control): | • 0.1 °/s ... 74 °/s (horizontal) • 0.1 °/s ... 36 °/s (vertical) |
| Preset rotation speed: | max. 62 °/s (horizontal) max. 36 °/s (vertical) |
| Horizontal rotation range: | 0 ° ... 345 ° - Rotation of the head is limited by stops |



User Manual

Code: P5AE-PV

IP SPEED DOME CAMERA OUTDOOR **P5AE-PV** Picco A2 Wi-Fi - 5 Mpx 4 mm DAHUA

| | |
|--------------------------------|---|
| Vertical rotation range: | 0 ° ... 80 ° |
| RS-485 interface: | — |
| Number of presets: | 300 |
| Horizontal scan: | — |
| Route settings: | — |
| Image compression method: | H.265+ / H.264 / H.265 / MJPEG / H.264+ |
| Alarm inputs / outputs: | — |
| Main stream frame rate: | 25 fps - 5 Mpx |
| Memory card slot: | Micro SD card support up to 256GB |
| Interface: | <ul style="list-style-type: none">• Wi-Fi - 2.4 GHz IEEE 802.11 b/g/n,• 10/100 Base-T (RJ-45) |
| WEB Server: | Built-in, NVR compliance |
| Max. number of on-line users: | 20 |
| ONVIF: | — |
| Audio: | <ul style="list-style-type: none">• Microphone built-in• Speaker built-in• Audio detection• Bi-directional audio streaming support |
| Mobile phones support: | Port 37777 <ul style="list-style-type: none">• Android: Free application DMSS• iOS (iPhone): Free application DMSS |
| Default admin user / password: | admin / - The administrator password should be set at the first start |
| Default IP address: | 192.168.1.108 |
| Web browser access ports: | 80, 37777 |
| PC client access ports: | 37777 |
| Mobile client access ports: | 37777 |
| Port ONVIF: | 80 |
| RTSP URL: | rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream |
| Intelligent image analysis: | <ul style="list-style-type: none">• intrusion• linkage tracking• crossing the line (tripwire) |



User Manual

Code: P5AE-PV

IP SPEED DOME CAMERA OUTDOOR **P5AE-PV** Picco A2 Wi-Fi - 5 Mpx 4 mm DAHUA

| | |
|------------------------|---|
| Main features: | <ul style="list-style-type: none">• When Smart Dual Light is active, the white light will turn on automatically only when an object is detected in the monitored area, which effectively improves the image quality• Active deterrence function - Light and sound alarm• Intelligent Object Tracking• Wi-Fi module - IEEE 802.11 b/g/n,• D-WDR - Wide Dynamic Range• Day/night mode• BLC - Back Light Compensation• HLC - High Light Compensation (spot)• ICR - Movable InfraRed filter• motion detection based on human detection• SMD 3.0 - searching for an object classified as: human, motor vehicle |
| Power supply: | 12 V DC / 1 A |
| Power consumption: | ≤ 11 W |
| Housing: | Speed Dome, Plastic |
| Color: | White |
| "Index of Protection": | IP66 |
| Operation temp: | -30 °C ... 55 °C |
| Weight: | 0.44 kg |
| Dimensions: | Ø 111 x 141 mm (without bracket) |
| Supported languages: | English |
| Manufacturer / Brand: | DAHUA |
| Guarantee: | 3 years |

Rear view:




RESET button:



Memory card slot and "Reset" button:



Dimensions:

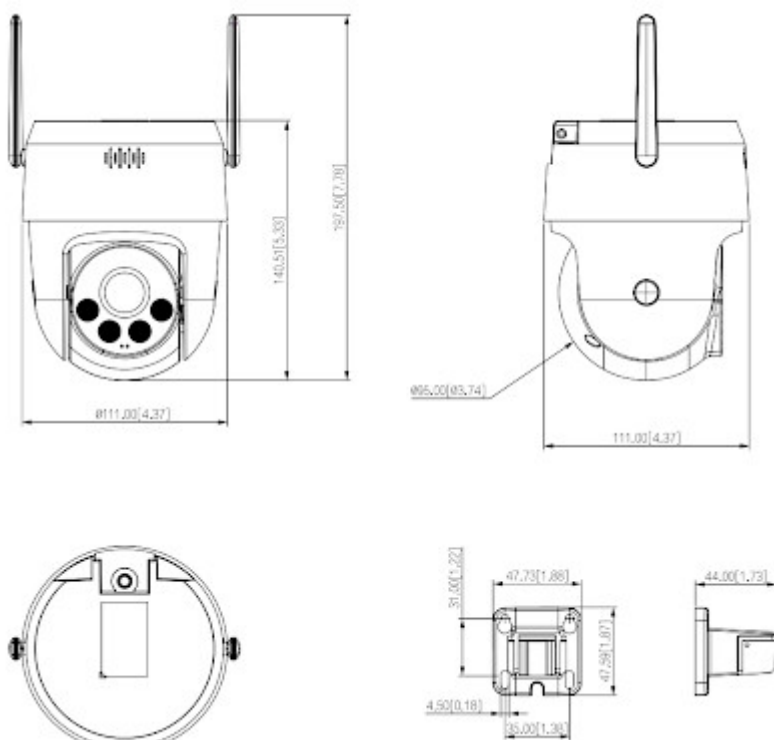

See how to initialize DAHUA cameras:

:

In the kit:



User Manual

Code: P5AE-PV

IP SPEED DOME CAMERA OUTDOOR **P5AE-PV** Picco A2 Wi-Fi - 5 Mpx 4 mm DAHUA



PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|