


Code: ACX-210

## MINIATURE WIRELESS EXPANDER **ACX-210** ABAX/ABAX2 SATEL

The module allows to connect wireless devices to the wireless ABAX/ABAX2 system. The device has very small dimensions.

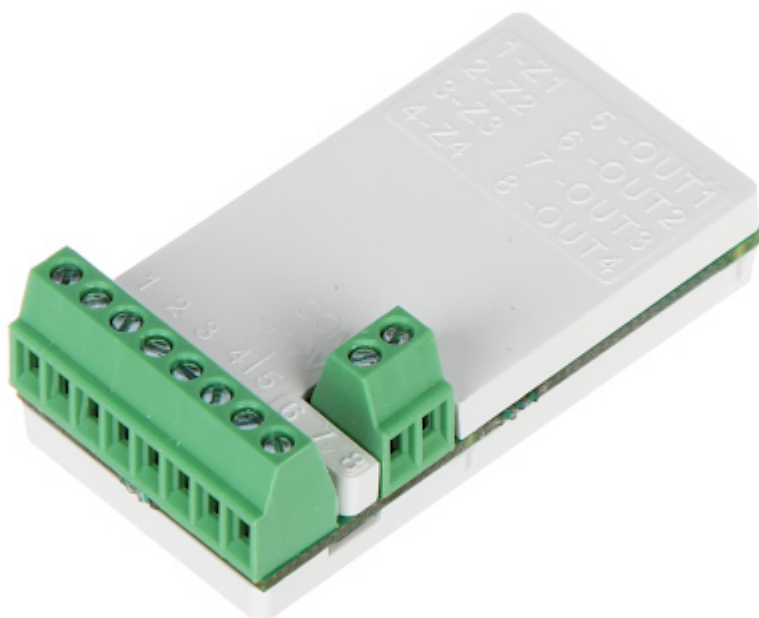

|                                                |                                                                                                                                                  |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Inputs:                                        | 4 pcs NO, NC, EOL, 2EOL/NO, 2EOL/NC                                                                                                              |
| Outputs:                                       | 4 pcs OC                                                                                                                                         |
| Frequency band:                                | 868 ... 868.6 MHz                                                                                                                                |
| Radio communication range (at open area):      | <ul style="list-style-type: none"> <li>• ≤ 2000 m - ABAX2 @ ACU-220,</li> <li>• ≤ 1400 m - ABAX2 @ ACU-280,</li> <li>• ≤ 500 m - ABAX</li> </ul> |
| Tamper output:                                 | —                                                                                                                                                |
| Load capacity of OC type programmable outputs: | 50 mA / 12 V DC                                                                                                                                  |
| Main features:                                 | <ul style="list-style-type: none"> <li>• Remote configuration</li> <li>• Remote update of module software</li> </ul>                             |
| Power supply:                                  | 4 ... 24 V DC                                                                                                                                    |
| Current consumption:                           | max. 35 mA                                                                                                                                       |
| Operation temp:                                | -10 °C ... 55 °C                                                                                                                                 |
| Weight:                                        | 0.008 kg                                                                                                                                         |
| Dimensions:                                    | 41 x 21 x 13 mm                                                                                                                                  |
| Manufacturer / Brand:                          | SATEL                                                                                                                                            |
| Guarantee:                                     | 2 years                                                                                                                                          |