


Code: ASC2204B-S

ACCESS CONTROLLER **ASC2204B-S** DAHUA

The ASC2204B-S controller is intended to use in access control systems based on electrical control of door opening.

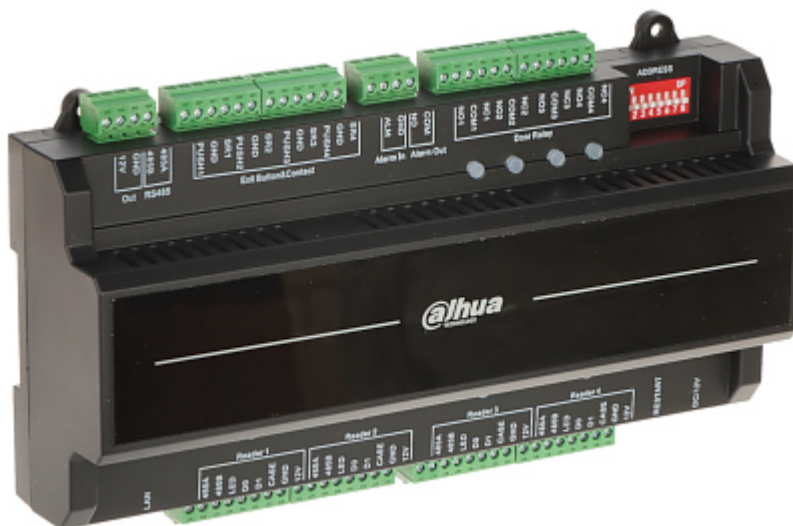

Number of served transitions:	4 (one-way)
Support:	DAHUA
Number of supported readers:	4 pcs
Battery backup support:	—
Output lines:	5 pcs - Relay
Communication:	• RS-485, • Ethernet, • Wiegand
Power supply:	12 V DC / 1.4 A
Main features:	• 100000 indexed users • History of 150000 events • Remote programming from PC • Function of protection against multiple use of the same card for access (anti-passback) • Counter of the door opening time with the possibility of sending an alarm signal after exceeding the set value • Automatic sending of alarm messages to the SmartPSS system or after entering a code, card or fingerprint defined as door opening under duress
Default IP address:	192.168.0.2
Default admin user / password:	admin / - The administrator password should be set at the first start
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Weight:	0.354 kg



DATA SHEET

Dimensions:	207 x 116 x 52 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

