


Code: IP-5-11-L2

SWITCH POE **IP-5-11-L2** 5-PORT ATTE

The IP-5-11-L2 set consists of the XPOE-6-11-OF switch module and the APS-90-480-OF switching power supply enclosed in the ABOX-L2 external enclosure with IP56 tightness class.

The LONG RANGE operation mode allows to increase the range of power and data transmission for ports LAN 1 ... LAN 4 to 280m while limiting the network bandwidth for these ports to 10Mbps.

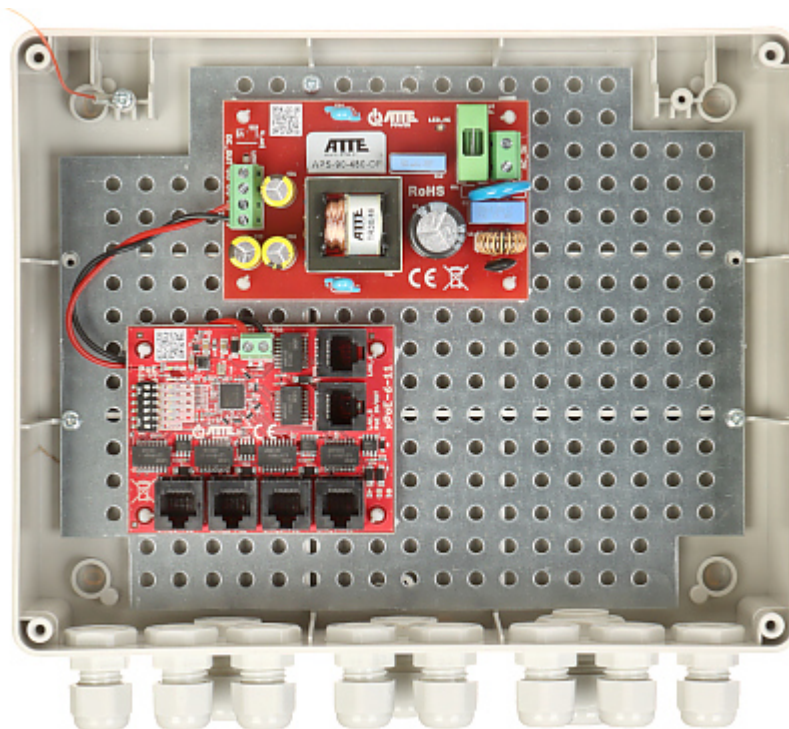

LAN ports:	• 1 x RJ45 10/100 Base-T - Uplink, • 5 x RJ45 10/100 Base-T + PoE (802.3af/at) / Passive PoE
Management:	—
LED diodes:	Power, LAN
Transmission speed:	10 / 100 Mbps : 1 Port LAN + 5 LAN & PoE ports
Maximal output power:	• 40 W @ Passive PoE - LAN1 ... LAN4 ports, • 60 W @ Passive PoE - Port LAN5, • 30 W @ PoE (802.3af/at) - LAN1 ... LAN5 ports
Maximal total power:	60 W
Operation modes:	• Standard : 100 m @ 10/100 Mb/s - LAN1 ... LAN6 ports • Long Range : 280 m @ 10 Mb/s - LAN1 ... LAN4 ports ; 100 m @ 10/100 Mb/s - LAN5, LAN6 ports

Main features:	• Possible cascading device connection (power transmission between devices using Passive PoE via LAN 5 port) • The output PoE voltage is equal to the input voltage • The ability to independently turn on and off the PoE power for each of the LAN 1 ... LAN 5 ports • The modular design streamlines service tasks and enables quick and easy system expansion • The raster system of module assembly facilitates the expansion of the device by further modules • The ABOX-L2 mounting enclosure is equipped with 11 cable entries with glands in the 10 x M16 + 1 x M20 arrangement • "Index of Protection" : IP56
Power supply:	190 ... 260 V AC - cable terminals
Weight:	1.02 kg
Dimensions:	248 x 198 x 96 mm
Manufacturer / Brand:	ATTE
Guarantee:	3 years