


DATA SHEET

Code: ETH-ETH500-SET

EXTENDER ETHERNET+POE **ETH-ETH500-SET** ATTE

 $\ensuremath{\mathsf{ETH}}\xspace.\ensuremath{\mathsf{ETH}}\xspace.\ensuremath{\mathsf{ETM}}$

The device is powered from the PoE switch or other device compliant with this standard. Thanks to this, neither the extender nor the camera connected to it require any additional power supply.

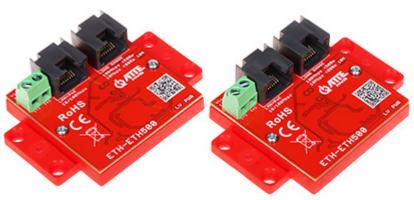

LAN ports:	2 x RJ45 10/100 Base-T + Passive PoE
LED diodes:	LAN, PoE, 10Mb
UTP transmission range:	< 800 m (max)
Transmission speed:	10 / 100 Mbps : 2 LAN & PoE ports
Maximal output power:	< 250 m - 100 Mbps - 50 W < 500 m - 100 Mbps - 25 W < 800 m - 10 Mbps - 15 W
Maximal total power:	50 W
Main features:	 Can be powered from a switch (PoE 802.3at/af, Passive PoE) and via screw connectors Possibility to connecting in cascade The device can function as a LAN network and PoE power extender The output PoE voltage is equal to the input voltage
Power supply:	44 58 V DC - Passive PoE 12 58 V DC - screw connectors
Power consumption:	1.35 W
Weight:	0.05 kg
Dimensions:	73 x 52 x 20 mm (single element)
Manufacturer / Brand:	ATTE
Guarantee:	3 years