


Code: UPK-1

RELAY MODULE **UPK-1** EWIMAR

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

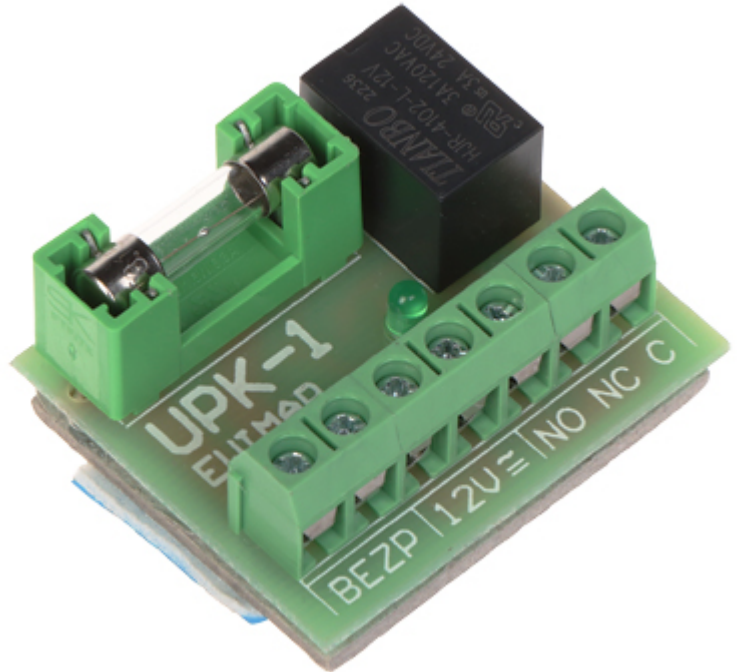

| | |
|--------------------------|---|
| Number of relay outputs: | 1 |
| Power supply: | 12 V AC/DC |
| Current consumption: | 25 mA @ 12 V DC |
| Relay maximal load: | 1 A @ 30 V AC/DC (max) |
| Output: | 1 x NO/NC |
| Main features: | <ul style="list-style-type: none"> • LED indication • 5/20mm delayed fuse - 2 A |
| Operation temp: | -10 °C ... 50 °C |
| Weight: | 0.019 kg |
| Dimensions: | 40 x 34 x 19 mm |
| Manufacturer / Brand: | EWIMAR |
| Guarantee: | 2 years |