


Code: VERSA-LED-BL

## KEYPAD FOR ALARM CONTROL PANEL **VERSA-LED-BL** SATEL

The VERSA-LED-BL keypad is intended for daily operations and programming the VERSA series alarm control system. The status indication is showed by LEDs and acoustic signals.

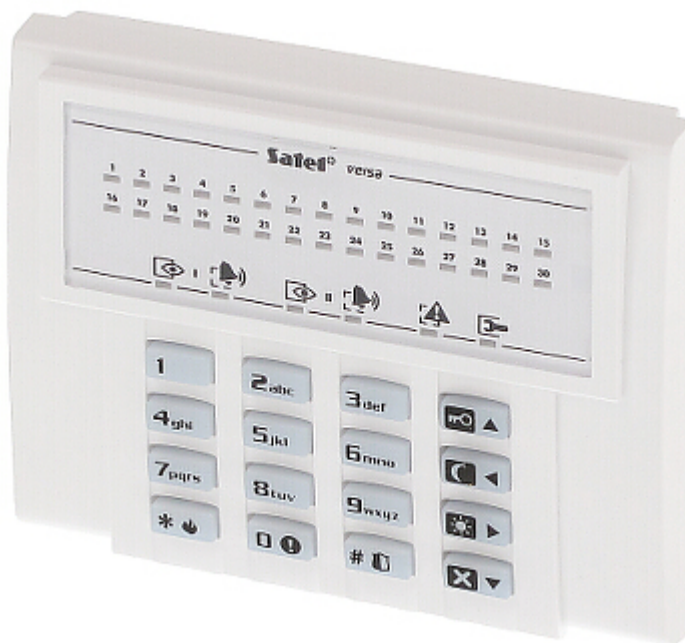

|                       |                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Support:              | VERSA                                                                                                                                                                                                                                                                                                                                                                        |
| Main features:        | <ul style="list-style-type: none"> <li>• Blue backlight of the keys</li> <li>• LEDs indicating device operation state</li> <li>• Quick switch on the selected standby mode by function keys</li> <li>• Alarms: keypad hold-down PANIC, FIRE and AUX</li> <li>• Buzzer for acoustic signaling of some system events</li> <li>• Panel communication loss indication</li> </ul> |
| Power supply:         | 12 V DC                                                                                                                                                                                                                                                                                                                                                                      |
| Current consumption:  | max. 120 mA                                                                                                                                                                                                                                                                                                                                                                  |
| Operation temp:       | -10 °C ... 55 °C                                                                                                                                                                                                                                                                                                                                                             |
| Weight:               | 0.1 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Dimensions:           | 105 x 95 x 22 mm                                                                                                                                                                                                                                                                                                                                                             |
| Manufacturer / Brand: | SATEL                                                                                                                                                                                                                                                                                                                                                                        |
| Guarantee:            | 2 years                                                                                                                                                                                                                                                                                                                                                                      |