



# User Manual

Code: DS-2CD1621FWD-IZ(2.8-12mm)  
IP CAMERA **DS-2CD1621FWD-IZ(2.8-12mm)** - 1080p Hikvision

## Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

### Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

**Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.**

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

### Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. The used motozoom lens with 2.8 ... 12 mm focal length allows to remote view angle adjustment. Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.



|                             |                                                                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                   | TCP/IP                                                                                                                             |
| Sensor:                     | 1/2.8 " Progressive Scan CMOS                                                                                                      |
| Matrix size:                | 2.1 Mpx                                                                                                                            |
| Resolution:                 | 1920 x 1080 - 1080p<br>1280 x 960 - 1.3 Mpx<br>1280 x 720 - 720p                                                                   |
| Lens:                       | 2.8 ... 12 mm - Motozoom                                                                                                           |
| View angle:                 | <ul style="list-style-type: none"> <li>• 100 ° ... 35 ° (manufacturer data)</li> <li>• 95 ° ... 35 ° (our tests result)</li> </ul> |
| Compression:                | H.264+ / H.264 / MJPEG                                                                                                             |
| S/N ratio:                  | > 50 dB (AGC off)                                                                                                                  |
| Range of IR illumination:   | 30 m                                                                                                                               |
| Alarm inputs / outputs:     | —                                                                                                                                  |
| Bitrate:                    | 32 ... 8192 kbps - H.264                                                                                                           |
| Main stream frame rate:     | 25 fps @ 1080p                                                                                                                     |
| Network interface:          | 10/100 Base-T (RJ-45)                                                                                                              |
| Network protocols:          | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, IEEE 802.1x, QoS, IPv6, Bonjour           |
| Audio:                      | —                                                                                                                                  |
| WEB Server:                 | Built-in, NVR compliance                                                                                                           |
| Memory card slot:           | Micro SD memory cards up to 128GB support (possible local recording)                                                               |
| Mobile client access ports: | 8000                                                                                                                               |



# User Manual


Code: DS-2CD1621FWD-IZ(2.8-12mm)  
IP CAMERA **DS-2CD1621FWD-IZ(2.8-12mm)** - 1080p Hikvision

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port ONVIF:                    | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Max. number of on-line users:  | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ONVIF:                         | 2.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Mobile phones support:         | Port no.: 8000 or access by a cloud (P2P)<br>• Android: Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a><br>• iOS (iPhone): Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a>                                                                                                                                                                                                                                                                                           |
| Default admin user / password: | admin / -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Default IP address:            | 192.168.1.64                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Web browser access ports:      | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| PC client access ports:        | Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Mobile client access ports:    | 8000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Port ONVIF:                    | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| RTSP URL:                      | • Main stream<br>rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization<br>rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization<br>• Sub stream<br>rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization<br>rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization                                                                                                                                            |
| RS-485 interface:              | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Main features:                 | • WDR - 120 dB - Wide Dynamic Range<br>• 3D-DNR - Digital Noise Reduction<br>• ROI - improve the quality of selected parts of image<br>• AGC - Automatic Gain Control<br>• ICR - Movable InfraRed filter<br>• WB - White Balance (ATW/AWB/manual/indoor/outdoor)<br>• BLC - configurable Back Light Compensation<br>• HLC - High Light Compensation (spot)<br>• Day/Night mode (color/b&w/auto)<br>• Motion Detection<br>• Configurable Privacy Zones<br>• Mirror - Mirror image<br>• Sharpness - sharper image outlines |
| Power supply:                  | • PoE (802.3af),<br>• 12 V DC / 920 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Power consumption:             | ≤ 11 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Operation temp:                | -30 °C ... 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Housing:                       | Compact, Metal / Plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Color:                         | White                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| "Index of Protection":         | IP67                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Supported languages:           | English, Bulgarian, Chinese, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Japanese, Korean, Lithuanian, Latvian, German, Norwegian, Polish, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Vietnamese, Italian                                                                                                                                                                                                                                    |
| Weight:                        | 1.03 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                       |                |
|-----------------------|----------------|
| Dimensions:           | Ø 90 x 294     |
| Manufacturer / Brand: | Hikvision      |
| SAP Code:             | 300726257      |
| Guarantee:            | <b>3 years</b> |



View after remove the cover:

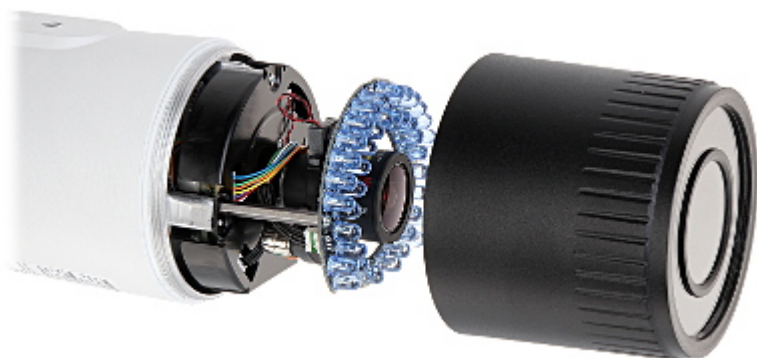


Memory card slot:



Side view:



Camera mounting side view:

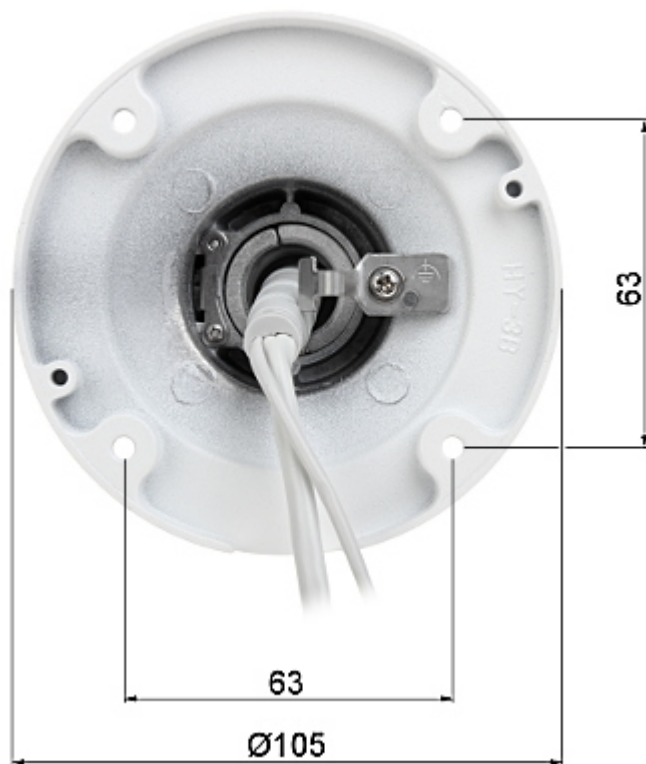

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|