

Code: OMEGA-PTZ-22H4-4

AHD, HD-CVI, HD-TVI, CVBS SPEED DOME CAMERA OUTDOOR **OMEGA-PTZ-22H4-4** -  $1080p\ 2.8\ ...$ 

### Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

- 1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
- 2. Improper results of operation of the product or products related with it;
- 3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

#### Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

#### Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.



2024-04-26 OMEGA-PTZ-22H4-4 1/6



Code: OMEGA-PTZ-22H4-4

AHD, HD-CVI, HD-TVI, CVBS SPEED DOME CAMERA OUTDOOR **OMEGA-PTZ-22H4-4** - 1080p 2.8 ... 12 mm

Small dimensions, outdoor PTZ camera with motozoom lens.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. During transmission there are no delays and is maintained the original, high quality image.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance). Camera is according to IP66 Index of Protection norm.

#### Attention!

In order to change the standard via RS-485 (using the keyboard or from the recorder level):

- $\bullet$  2x call the preset 137 to change to AHD.
- 2x call the preset 138 to change to TVI.
- 2x call the preset 139 to change to CVI.
- 2x call the preset 140 to change to CVBS.



Standard:	AHD, HD-CVI, HD-TVI, CVBS
Sensor:	1/2.9 " Sony CMOS
Matrix size:	2.1 Mpx
Resolution:	• AHD, HD-CVI, HD-TVI: 1920 x 1080 px - 1080p  • CVBS: 960 x 576 px - 960H
Range of IR illumination:	45 m
Lens:	2.8 12 mm - Motozoom
View angle:	• 91 ° 28 ° (manufacturer data) • 76 ° 30 ° (our tests result)
Optical zoom:	x 4
Digital zoom:	x 16
Rotation speed depending on ZOOM level:	1
Auto IR illuminator:	<b>→</b>
Horizontal rotation range:	0 ° 355 ° - Rotation of the head is limited by stops
Vertical rotation range:	0 ° 70 °
Rotation speed (manual control):	25 °/s (horizontal) , 20 °/s (vertical)



Code: OMEGA-PTZ-22H4-4

AHD, HD-CVI, HD-TVI, CVBS SPEED DOME CAMERA OUTDOOR **OMEGA-PTZ-22H4-4** -  $1080p\ 2.8\ ...\ 12\ mm$ 

Preset rotation speed:  25 °/s (horizzontal) 20 °/s (vertical)  PTZ control:  Via interface RS-485, Default address : 1, 2400 bps  Protocols:  Pelco-D, Pelco-P (auto detection)  S/N ratio:  > 50 dB  Video output:  AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp 75 Ω  Audio:  -  Number of presets:  220  Route settings:  8  Horizontal scan:  -  Park action:  Calling the preset position after a specified dwell time  Alarm inputs / outputs:  -  ICR · Movable InfraRed filter
Protocols:  Pelco-D, Pelco-P (auto detection)  S/N ratio:  > 50 dB  AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp 75 Ω  Audio:  —  Number of presets:  220  Route settings:  8  Horizontal scan:  —  Park action:  Calling the preset position after a specified dwell time  Alarm inputs / outputs:  —  **ICR - Movable InfraRed filter*  • 3D-DNR - Digital Noise Reduction  • AGC - Automatic Gain Control  • Auto White Balance  • Sharpness - sharper image outlines  OSD menu:  Power supply:  12 V DC / 940 mA
S/N ratio: > 50 dB  Video output: AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp 75 Ω  Audio: —  Number of presets: 220  Route settings: 8  Horizontal scan: —  Park action: Calling the preset position after a specified dwell time  Alarm inputs / outputs: —  Main features: ICR - Movable InfraRed filter - 3D-DNR - Digital Noise Reduction - 3D-DNR - Digital Noise Reduction - Auto White Balance - Sharpness - sharper image outlines  OSD menu: ✓  Power supply: 12 V DC / 940 mA
Video output: AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp 75 Ω   Audio: —   Number of presets: 220   Route settings: 8   Horizontal scan: —   Park action: Calling the preset position after a specified dwell time   Alarm inputs / outputs: —   Main features: • ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • Auto White Balance • Sharpness - sharper image outlines   OSD menu: ✓   Power supply: 12 V DC / 940 mA
Audio:  Number of presets:  220  Route settings:  8  Horizontal scan:  Park action:  Calling the preset position after a specified dwell time  Alarm inputs / outputs:  —  ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • Auto White Balance • Sharpness - sharper image outlines  OSD menu:  Power supply:  12 V DC / 940 mA
Number of presets:  220  Route settings:  8  Horizontal scan:  Park action:  Calling the preset position after a specified dwell time  Alarm inputs / outputs:   Main features:  ICR - Movable InfraRed filter  3D-DNR - Digital Noise Reduction  - AGC - Automatic Gain Control  - Auto White Balance  - Sharpness - sharper image outlines  OSD menu:  Power supply:  12 V DC / 940 mA
Route settings:  Horizontal scan:  Park action:  Calling the preset position after a specified dwell time  —  Alarm inputs / outputs:  —  ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • Auto White Balance • Sharpness - sharper image outlines  OSD menu:  Power supply:  12 V DC / 940 mA
Horizontal scan:  Park action:  Calling the preset position after a specified dwell time  Alarm inputs / outputs:
Park action:  Calling the preset position after a specified dwell time  —  ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • Auto White Balance • Sharpness - sharper image outlines  OSD menu:  Power supply:  12 V DC / 940 mA
Alarm inputs / outputs:
• ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • Auto White Balance • Sharpness - sharper image outlines  OSD menu:  Power supply:  12 V DC / 940 mA
• 3D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • Auto White Balance • Sharpness - sharper image outlines  OSD menu:  ✓  Power supply:  12 V DC / 940 mA
Power supply: 12 V DC / 940 mA
Power consumption.
Tower consumption.
Housing: Speed Dome, Plastic
Color: White
"Index of Protection": IP66
Vandal-proof: -
Operation temp: -40 °C 60 °C
Weight: 0.57 kg
Dimensions: Ø 111 x 102 mm
Supported languages: English
Guarantee: 2 years

Small dimensions camera:



12 mm



Bottom view:




Camera mounting side view:



12 mm



#### Camera connectors:

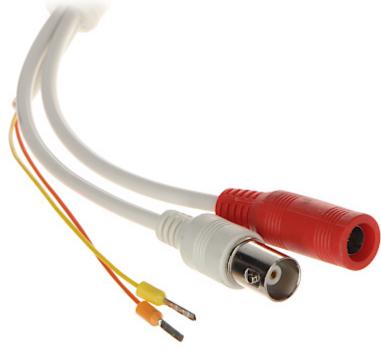

Yellow RS-485A Orange RS-485B In the kit:





Code: OMEGA-PTZ-22H4-4

AHD, HD-CVI, HD-TVI, CVBS SPEED DOME CAMERA OUTDOOR  $\bf OMEGA\text{-}PTZ\text{-}22H4\text{-}4$  - 1080p 2.8 ... 12 mm



**PACKAGE** 

Dimensions (L x W x H): 0x0x0 mm

Gross Weight: 0 kg

2024-04-26 OMEGA-PTZ-22H4-4 6/6