

Code: IPC-HDW3549H-AS-PV-0280B-S4-BLACK IP CAMERA IPC-HDW3549H-AS-PV-0280B-S4-BLACK TiOC Full-Color - 5 Mpx 2.8 mm DAHUA

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

- 1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
- 2. Improper results of operation of the product or products related with it;
- 3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.





Code: IPC-HDW3549H-AS-PV-0280B-S4-BLACK IP CAMERA IPC-HDW3549H-AS-PV-0280B-S4-BLACK TiOC Full-Color - 5 Mpx 2.8 mm DAHUA

The **DAHUA TIOC** series of cameras are modern IP cameras combining 3 innovative technologies: **Dahua Full-Color** - 24/7 color image, **Wiz-Sense** - AI artificial intelligence functions and audio-visual **active deterrence**

In addition, the camera has the function of active deterrence of intruders using flashing red and blue light and siren sound.

The camera is equipped with a dual illuminator: IR and white light with an intelligent switching function. In the night mode, the camera uses an IR illuminator, and when there is movement in the monitored area, it switches to the color mode with a white light illuminator for detailed recording of key events. This solution allows to minimize the light pollution generated by the camera after dark, while maintaining all the advantages of a color recording.

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 5 MPx. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5 Мрх
Resolution:	2960 x 1668 - 5 Mpx , 2880 x 1620 - 4.6 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 4 Mpx , 2048 x 1536 - 3 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	2.8 mm
View angle:	• 97 ° (manufacturer data) • 105 ° (our tests result)
Range of IR illumination:	≤ 30 m
White light LED illuminator range:	≤ 30 m
Min. illumination:	0.003 Lux / F1.0 (Color, 30IRE)
Image compression method:	AI H.265 / H.265+ / H.265 / AI H.264 / H.264+ / H.264 / H.264H / H.264B / MJPEG
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
RS-485 interface:	-



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Alarm inputs / outputs:	1/1
Audio:	Microphone built-in: 2 pcs, Audio input, Audio output, Speaker built-in, Bi-directional audio streaming support, Audio detection, Compliance with the AAC standard
Main stream frame rate:	20 fps @ 5 Mpx 25 fps @ 4 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, TCP, UDP, ARP, RTP, RTSP, RTCP, RTMP, SMTP, FTP, SFTP, DHCP, DNS, DDNS, QoS, UPnP, NTP, Multicast, ICMP, IGMP, NFS, SAMBA, PPPoE, SNMP
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	21.12
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application <u>DMSS</u> • iOS (iPhone): Free application <u>DMSS</u>
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream



Code: IPC-HDW3549H-AS-PV-0280B-S4-BLACK IP CAMERA IPC-HDW3549H-AS-PV-0280B-S4-BLACK TIOC Full-Color - 5 Mpx 2.8 mm DAHUA

Main features:	WDR - 120 dB - Wide Dynamic Range 3D-DNR - Digital Noise Reduction F-DNR (Defog) - Reduction of image noise caused by precipitation ROI - improve the quality of selected parts of image BLC/HLC - Back Light / High Light Compensation Full Color - colorful night mode White light (LED) illuminator built-in Day/Night mode (color/b&w/auto) ICR - Movable InfraRed filter Auto White Balance AGC - Automatic Gain Control Mirror - Mirror image Motion Detection Configurable Privacy Zones Light and sound alarm Active deterrence function SMD 4.0 - searching for an object classified as: human, motor vehicle - increased detection distance and resistance to false alarms Quick Pick - AI technology enabling, together with the recorder, quick identification of interesting objects (people/vehicles) based on an artificial intelligence algorithm. It allows to extract and compare the colors of clothes and vehicles AI SSA AI Smart Scene Adaptive - scene auto-adaptation using deep learning algorithms to detect environmental conditions such as rain, fog, backlight, low light and flickering, in order to set the optimal image parameters IVS analysis: Smart motion detection (with recognizing people and vehicles), crossing the line (tripwire), intrusion - classification of people and vehicles, scene changing, video tampering
Housing:	Dome - Metal
Color:	Black
"Index of Protection":	IP67
Vandal-proof:	-
Power supply:	• PoE (802.3af), • 12 V DC / 770 mA
Power consumption:	• ≤ 8.8 W @ PoE • ≤ 8.3 W @ 12 V
Operation temp:	-40 °C 60 °C
Weight:	0.75 kg
Dimensions:	Ø 122 x 111 mm
Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Russian, Portuguese, Romanian, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

Camera is out from clamping ring:





Code: IPC-HDW3549H-AS-PV-0280B-S4-BLACK IP CAMERA IPC-HDW3549H-AS-PV-0280B-S4-BLACK TIOC Full-Color - 5 Mpx 2.8 mm DAHUA



Memory card slot:





User Manual
Code: IPC-HDW3549H-AS-PV-0280B-S4-BLACK
IP CAMERA IPC-HDW3549H-AS-PV-0280B-S4-BLACK TIOC Full-Color - 5 Mpx 2.8 mm DAHUA



Camera mounting side view:



 $Camera\ connectors:$



Code: IPC-HDW3549H-AS-PV-0280B-S4-BLACK IP CAMERA IPC-HDW3549H-AS-PV-0280B-S4-BLACK TiOC Full-Color - 5 Mpx 2.8 mm DAHUA



Connectors description:



Presentation of the TiOC technology used in the camera:

See how to initialize DAHUA cameras:

In the kit:



Code: IPC-HDW3549H-AS-PV-0280B-S4-BLACK IP CAMERA IPC-HDW3549H-AS-PV-0280B-S4-BLACK TIOC Full-Color - 5 Mpx 2.8 mm DAHUA



Example captures of device interface:








DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Code: IPC-HDW3549H-AS-PV-0280B-S4-BLACK
IP CAMERA IPC-HDW3549H-AS-PV-0280B-S4-BLACK TIOC Full-Color - 5 Mpx 2.8 mm DAHUA

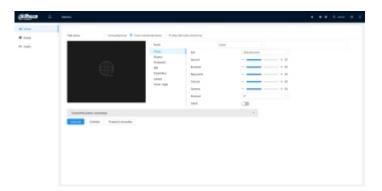

PACKAGE

Dimensions (L x W x H): 0x0x0 mm Gross Weight: 0 kg

9/9