



User Manual

Code: XPOE-6-11-OF
SWITCH POE **XPOE-6-11-OF** 5-PORT ATTE

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:


A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.


PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install. 5 ports support Power over Ethernet (PoE) function.

The LONG RANGE operation mode allows to increase the range of power and data transmission for ports LAN 1 ... LAN 4 to 280m while limiting the network bandwidth for these ports to 10Mbps.


Attention! Powering the switch via the LAN 5 port is only possible from Passive PoE devices from ATTE.

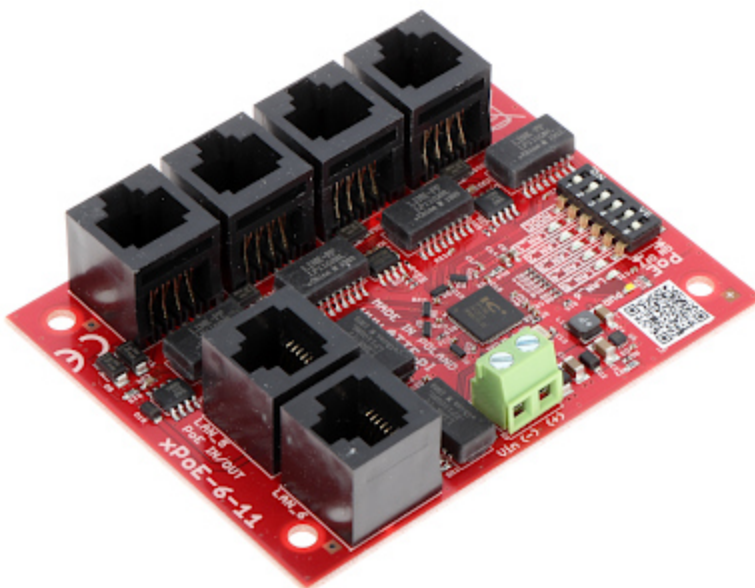

LAN ports:	<ul style="list-style-type: none"> • 1 x RJ45 10/100 Base-T - Uplink • 5 x RJ45 10/100 Base-T, PoE 802.3af/at / Passive PoE
Management:	—
LED diodes:	Power, LAN
Transmission speed:	10 / 100 Mbps : 1 Port LAN + 5 LAN & PoE ports
Maximal output power:	<ul style="list-style-type: none"> • 40 W @ Passive PoE - 1 ... 4 ports, • 70 W @ Passive PoE - Port 5, • 30 W @ PoE (802.3af/at) - 1 ... 5 ports
Maximal total power:	<ul style="list-style-type: none"> • 70 W @ Power supply PoE, • 230 W @ Power supply 48V DC
Operation modes:	<ul style="list-style-type: none"> • Standard : 100 m @ 10/100 Mb/s - 1 ... 6 ports • Long Range : 280 m @ 10 Mb/s - 1 ... 4 ports ; 100 m @ 10/100 Mb/s - 5, 6 ports
Main features:	<ul style="list-style-type: none"> • Possible power supply via Passive PoE via LAN 5 port • Possible cascading device connection (power transmission between devices using Passive PoE via LAN 5 port) • The LAN 5 (PoE IN/OUT) port can be used to power PoE devices as well as to draw power from other devices • The output PoE voltage is equal to the input voltage • The ability to independently turn on and off the PoE power for each of the LAN 1 ... LAN 5 ports
Power supply:	<ul style="list-style-type: none"> • 10 ... 56 V DC (cable terminals) • 10 ... 56 V DC (Passive PoE)
Weight:	0.05 kg
Dimensions:	88 x 68 x 20 mm
Manufacturer / Brand:	ATTE
Guarantee:	3 years

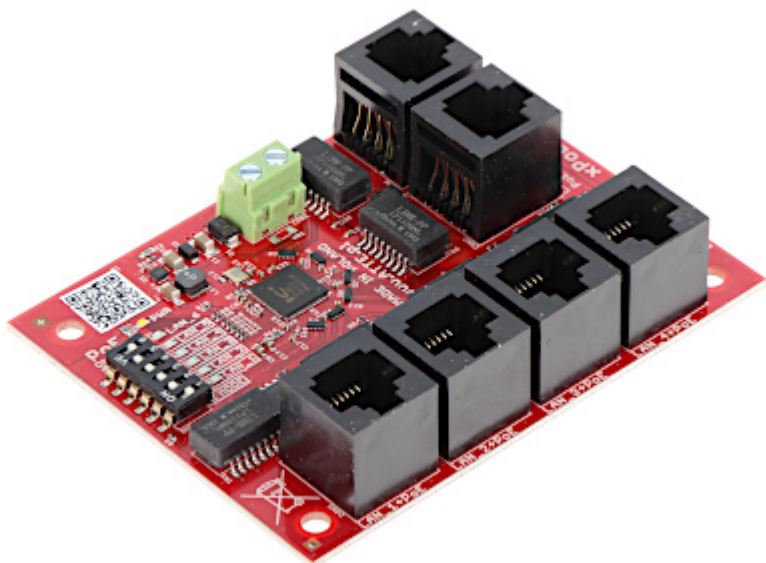

Top view:

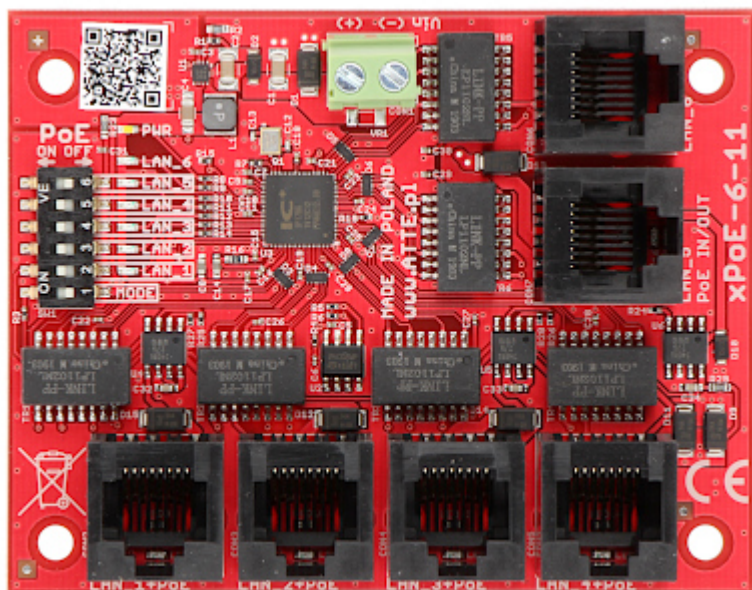

In the kit:





User Manual

Code: XPOE-6-11-OF
SWITCH POE **XPOE-6-11-OF** 5-PORT ATTE

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------