

Code: INT-IORS/IT

EXPANDER **INT-IORS/IT** 8 INPUTS/8 OUTPUTS SATEL

Net: **409.63 EUR** Gross: **409.63 EUR**

The device allows to extend the control panel with 8 additional inputs operating the NO, NC, EOL, 2EOL configurations and 8 programmable relay outputs. INT-IORS/IT is designed to mount on the DIN 35 mm rail.



SPECIFICATION

Support:	INTEGRA
Number of inputs:	8 pcs - programmable
Number of outputs:	8 pcs - programmable
Tamper output:	—
Outputs type:	Relay
Support configurations:	NO, NC, EOL, 2EOL/NO, 2EOL/NC
Relay switching current:	max. 16 A
Relay switching voltage:	max. 250 V AC
Maximal current consumption:	285 mA
Power supply:	12 V DC
Operation temp:	-10 °C ... 55 °C
Weight:	0.3 kg
Dimensions:	122 x 92 x 58 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years


PRESENTATION

Device connectors:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Device connectors:

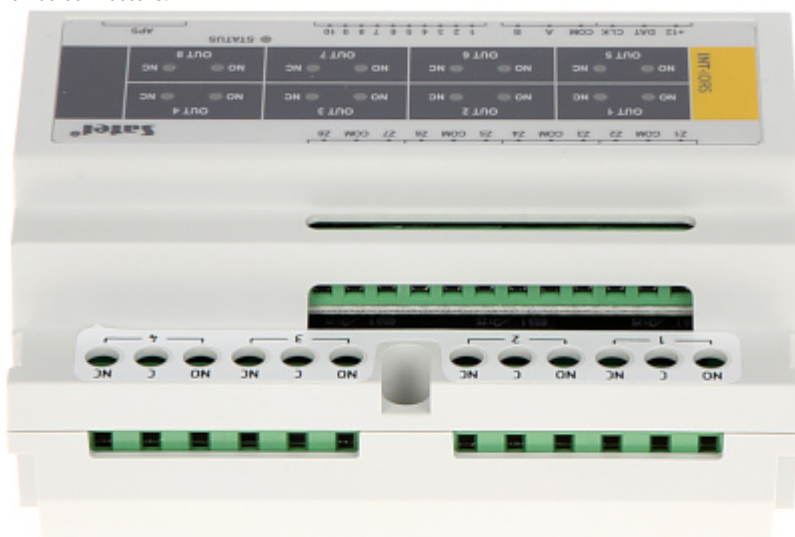


Top view:

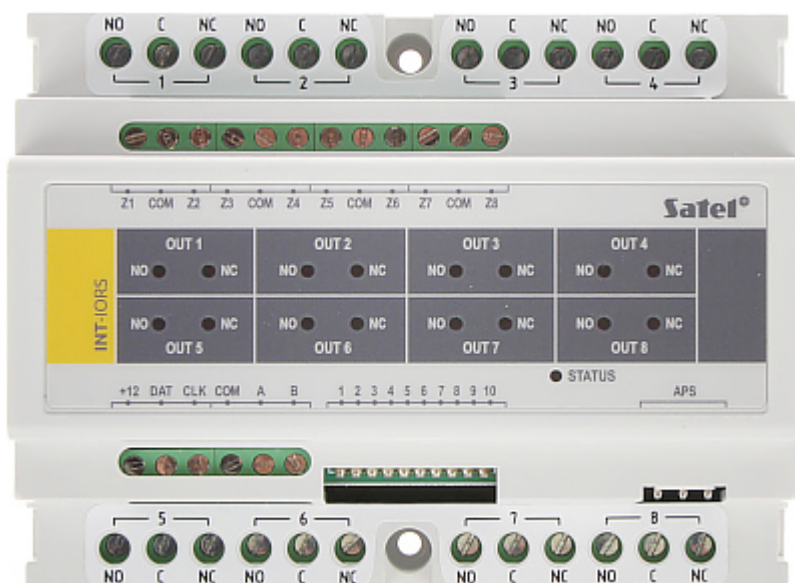

Mounting side view:

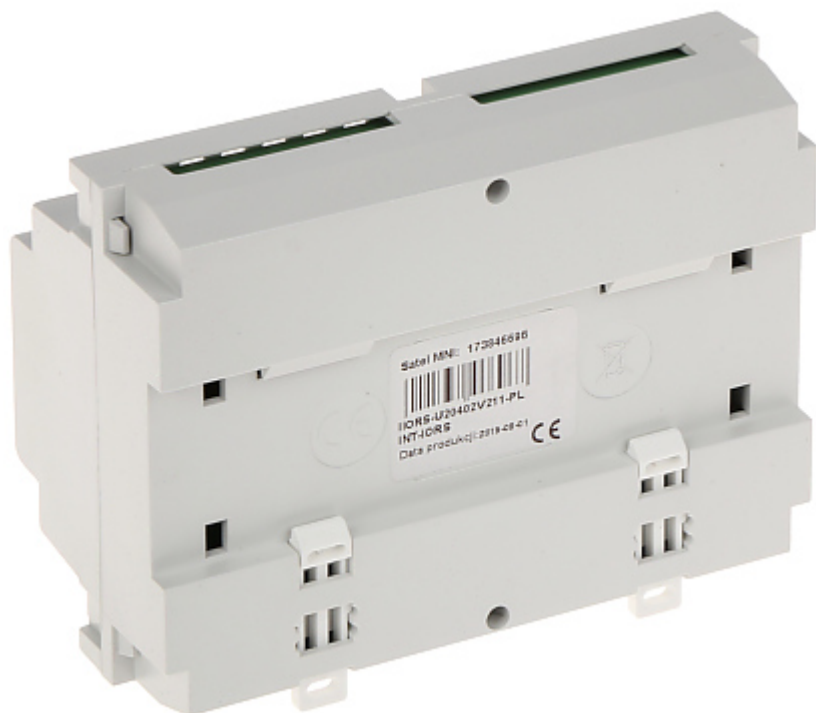

In the kit:

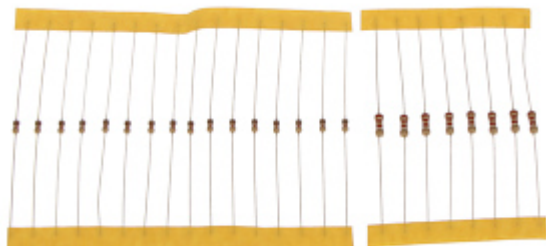

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------