

ALARM CONTROL PANEL INTEGRA-128-WRL/EN SATELNet: **697.15 EUR** Gross: **697.15 EUR**

Advanced alarm control unit providing alarm functions and optional implementation of home automation and access control systems. In comparison with the basic INTEGRA models, the INTEGRA-128-WRL/EN control unit is distinguished by its integrated GSM/GPRS communication unit and the ABAX wireless interface. The INTEGRA-128-WRL/EN is perfect option for systems where unobstructed wireless communication and advanced functionality is a priority.

System operation is possible with LCD keypads, partition keypads, keyfobs and proximity cards or remotely with PC or mobile phone.
Flash firmware upgrade with a PC.


**SPECIFICATION**

Mainboard inputs:	8 pcs
Mainboard outputs:	8 pcs
Maximal number of supported inputs:	128 pcs
Maximal number of supported outputs:	128 pcs
Current-carrying capacity, low-current programmable outputs:	50 mA
Current-carrying capacity, high-current programmable outputs (+/-10%):	2 A - 2 pcs
Maximal load:	2 A
Users + admins:	240 + 8
Partitions:	8
Zones:	32
Expansion modules:	max. 64
Events memory:	21503
Timers:	64
Supported keypads:	max. 8 pcs
Supporting the wireless ABAX system via bus:	✓
Keyboard included:	—
Enclosure included:	✓

Protection class (Grade):	2
Main features:	• Access control and home automation functions • The GSM/GPRS communicator built-in with monitoring, notification and remote control functions • Wireless ABAX (868MHz) system built-in
Power supply:	20 V AC
Operation temp:	-10 °C ... 55 °C
Permissible relative humidity:	93 %
Dimensions:	192 x 106 mm - PCB 382 x 324 x 108 mm - Housing
Weight:	2.13 kg (with enclosure and accessories)
Supported languages:	English
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION


Control panel mainboard:

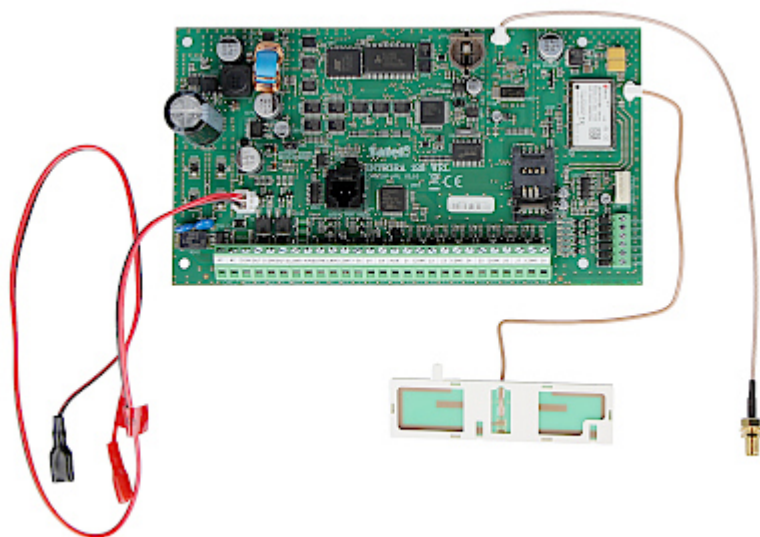


Housing:



Internal view of the housing:

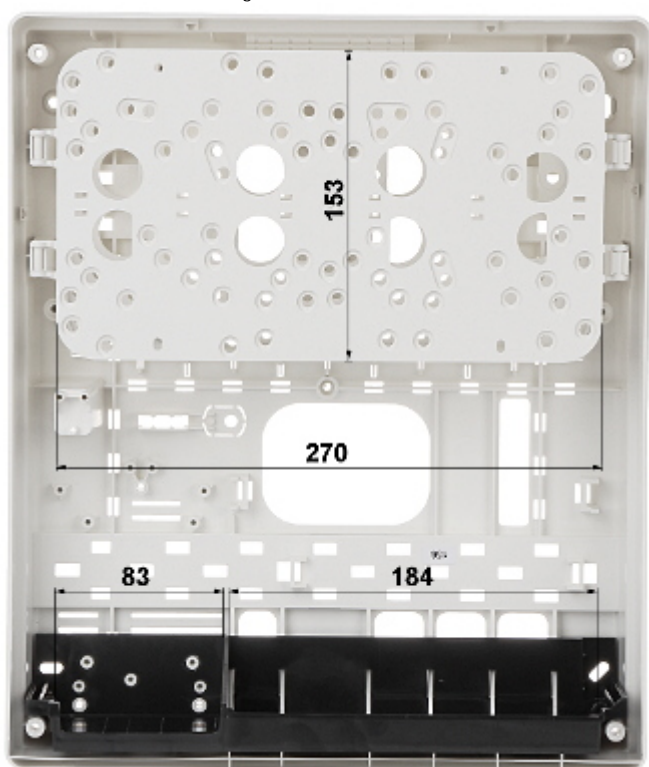


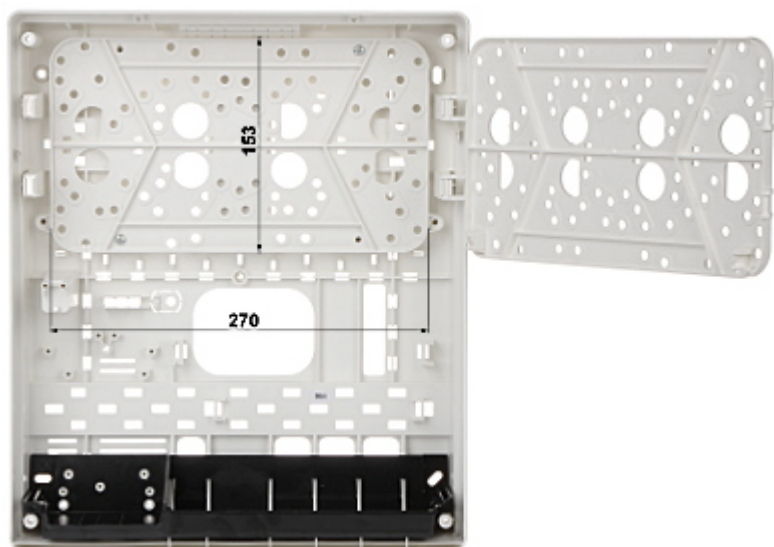

Mounting side view:



In the kit:

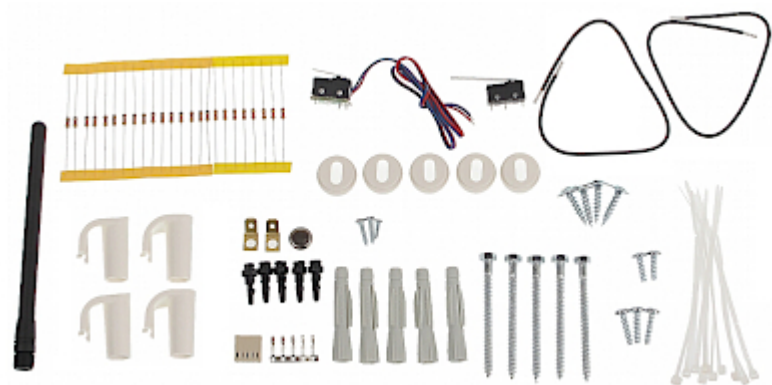

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

