

Code: K-32/LX

## WIRELESS KEYPAD K-32/LX PARADOX

Net: 99.76 EUR Gross: 99.76 EUR

The K-32/LX keypad is intended for daily operations and programming the PARADOX - Spectra SP series alarm control system. The keypad allows to support the systems with ability to usage the wireless devices such as e.g.: detectors, magnetic contacts, fobs without the need for additional module RTX3. With the LCD display showing text messages, even advanced functionalities of the alarm control unit are simple and convenient.



### SPECIFICATION

Support:	PARADOX: SPECTRA SP5500/SP6000/SP7000 V4.72+, SP4000/SP65 V4.90+
Frequency band:	433 MHz
Main features:	<ul style="list-style-type: none"><li>• LCD 2x16 characters</li><li>• Backlight color - Blue</li><li>• Support StayD function</li><li>• Buzzer for acoustic signaling of some system events</li><li>• One-touch action buttons</li><li>• Alarms: keypad hold-down PANIC, FIRE and AUX</li><li>• Assign to one or more partitions</li><li>• The ability to connect 1 alarm zone</li><li>• Independently set chime zones</li><li>• Connects to 4-wire communication bus</li><li>• PGM programmable output</li><li>• Adjustable backlight, contrast and scroll speed</li></ul>
Compliance with standards:	ETSI EN 301 489-3, ETSI EN 300 220-2, EN 50130-4, EN 55022
Color:	White / Silver
Power supply:	12 ... 14 V DC
Current consumption:	max. 120 mA
Weight:	0.260 kg
Dimensions:	123 x 144 x 33 mm
Supported languages:	Polish
Country of origin:	Canada
Manufacturer / Brand:	PARADOX

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Guarantee:

2 years

## PRESENTATION



Internal view:

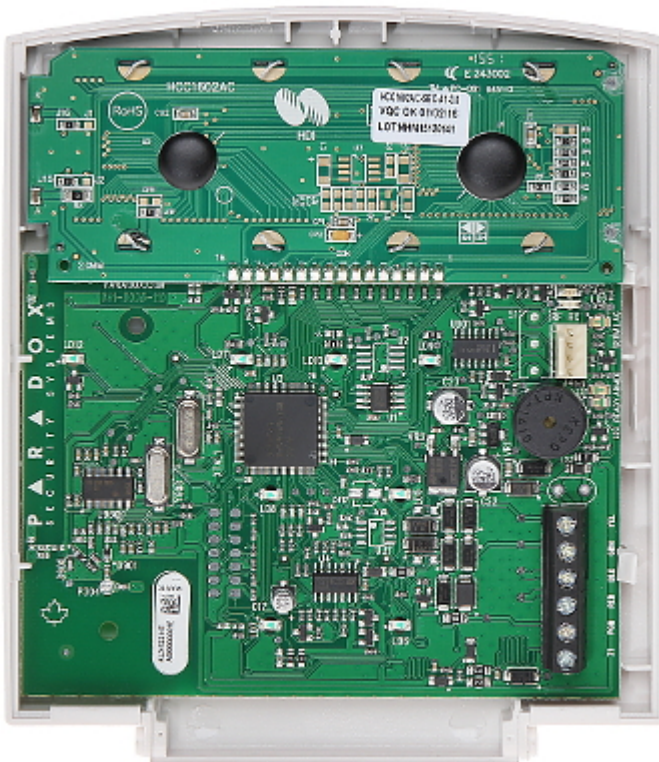


Mounting side view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



In the kit:

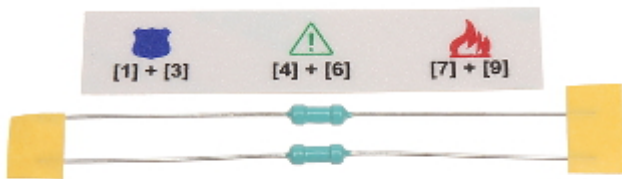

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------