

Code: MG-5050

## ALARM CONTROL PANEL **MG-5050** PARADOX

Net: 2 096.10 CZK Gross: 2 096.10 CZK

The MG-5050 control panel offers advanced solutions and communication via BUS, allowing to create module alarm system. With the communication bus the control panel can be expanded through a series of modules, both wired and wireless.

Flash firmware upgrade with a PC.



### SPECIFICATION


Number of supported wireless detectors:	max. 32 pcs - Any combination of wired and wireless detectors possible
Mainboard inputs:	5 pcs
Mainboard outputs:	4 pcs - programmable
Maximal number of supported inputs:	10 pcs - ATZ function
Maximal number of supported outputs:	16 pcs
Current-carrying capacity, low-current programmable outputs:	100 mA
Maximal load:	1.1 A
Users + admins:	32 + 1
Partitions:	2
Zones:	4
Expansion modules:	24 (3 x ZX8)
Events memory:	256
Timers:	16
Supported keypads:	max. 12 pcs
Keyboard included:	—
Enclosure included:	—
Protection class (Grade):	2
Main features:	<ul style="list-style-type: none"><li>• Built-in radio transmitter and receiver the signal frequency of 433 MHz</li><li>• Support StayD function</li><li>• The number of telephone numbers to notify: 5 - private numbers, 3 - monitoring stations, 1 - pager</li><li>• Access control and home automation functions</li><li>• The ability of cooperation with wireless devices modules</li></ul>
Power supply:	16.5 V AC / 700 mA
Power consumption:	≤ 40 VA
Operation temp:	0 °C ... 50 °C

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Permissible relative humidity:	93 %
Dimensions:	190 x 102 mm
Weight:	0.172 kg
Supported languages:	English
Country of origin:	Canada
Manufacturer / Brand:	PARADOX
Guarantee:	2 years

**PRESENTATION**


Control panel mainboard:

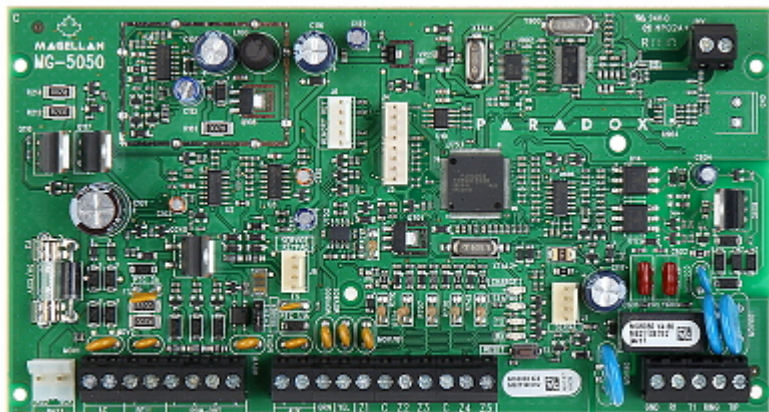

Connectors:

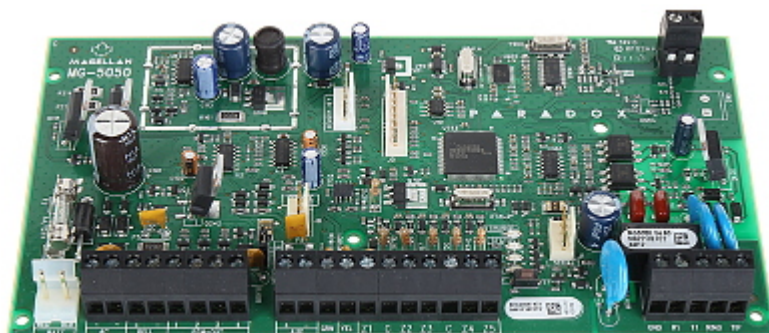

In the kit:

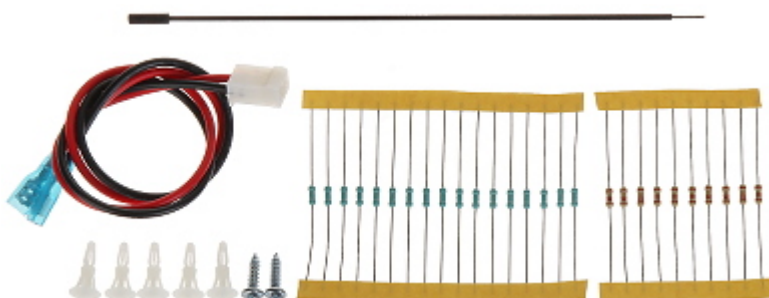

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------