


Code: 12V/24A/PA18

## SWITCHING ADAPTER 12V/24A/PA18

Net: 60.47 EUR Gross: 60.47 EUR

Power adapter is equipped with aesthetic, solidly made metal casing box. Adapter operation is indicated by LED placed on the casing box. Each power line is protected by a polymer fuse and has a LED indicator informing about output voltage presence. The adapter has the power off jumpers for each output.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!

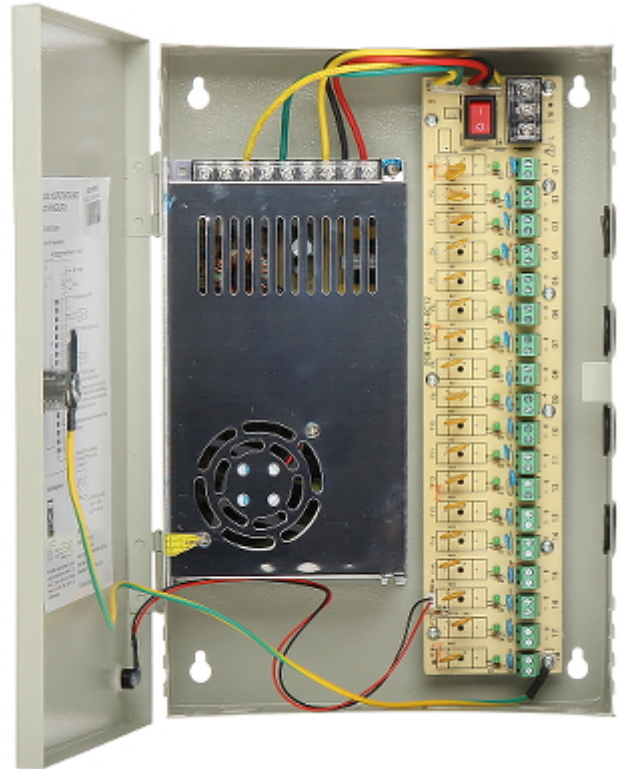

### SPECIFICATION

|                                        |                     |
|----------------------------------------|---------------------|
| Adapter type:                          | Switching           |
| Output voltage:                        | 12 V DC             |
| Output voltage adjustment:             | 11 ... 13 V         |
| LED indication:                        | ✓                   |
| Max. output current (total):           | 24 A                |
| Max. output current for single output: | 1.1 A               |
| Input voltage:                         | 230 V AC            |
| Power:                                 | 288 W               |
| Number of outputs:                     | 18                  |
| Connector type:                        | Cable terminals     |
| Housing type:                          | Metal, wall-mounted |
| Key closed:                            | ✓                   |
| Weight:                                | 1.882 kg            |
| Dimensions:                            | 315 x 215 x 65 mm   |
| Guarantee:                             | 2 years             |

### PRESENTATION

Internal view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Power adapter view in lockable casing:



Side view:



Mounting side view:



In the kit:



## OUR OPINIONS



- Due to the high level of interferences, power supply adapter requires additional noise filter.

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|