


Code: AWZ-101

BUFFERED POWER SUPPLY TRANSFORMER AWZ-101

Net: 57.51 EUR Gross: 57.51 EUR

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

Please pay attention for proper cooling conditions of the power adaptor during work!

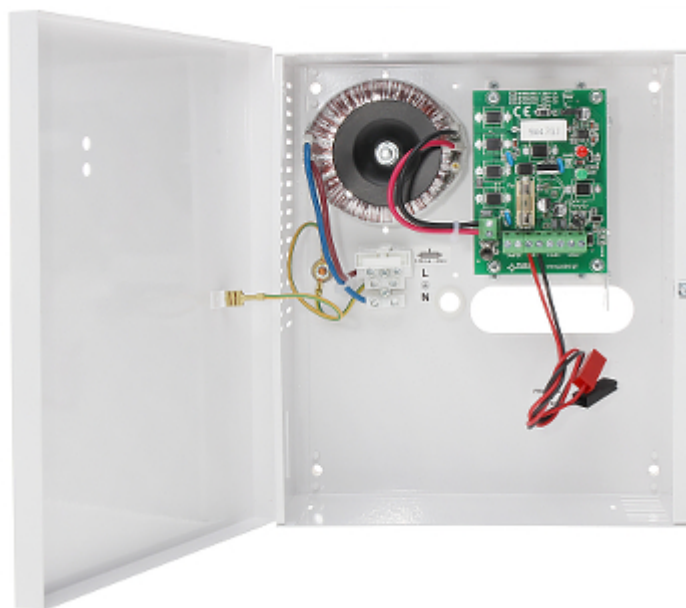


SPECIFICATION

Adapter type:	Transforming
Input voltage:	230 V AC
Output voltage:	12.8 V ... 13.8 V (buffer operation)
Max. output current (total):	1 A
Battery charging current:	0.1 A
Power:	18 W
Number of outputs:	1
Protections:	• Short-circuit • Overload • Overvoltage • Overheat • Tamper • Reverse polarity connection
Adapter operation control:	• AC input voltage presence indication AC • DC output voltage presence indication DC
Place for battery:	12V/7Ah
Max. battery dimensions:	180 x 100 x 80 mm
Weight:	2.45 kg
Dimensions:	235 x 205 x 85 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Internal view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

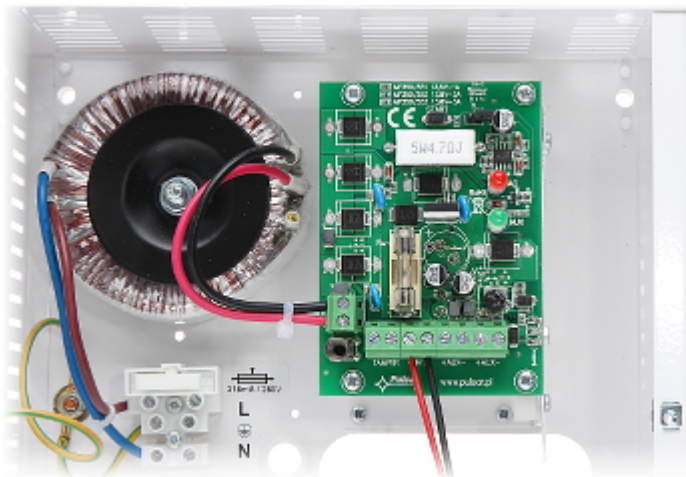


Front view:



Mounting side view:



Dimensions:

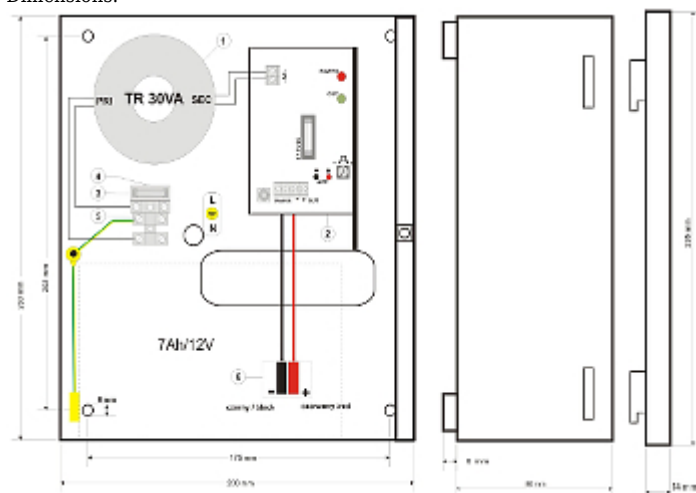

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------