

Code: LR1002-1ET-V3

EXTENDER ETHERNET+PoE **LR1002-1ET-V3** TRANSMITTER DAHUA

Net: **26.36 EUR** Gross: **26.36 EUR**

The LR1002-1ET-V3 extender allows to increase a distance of transmission of the data and PoE 802.3 at/af, ePoE powering via coaxial cable.

The device operates from the camera side.

WARNING! The PoE power is supplied together with data on pairs 1, 2 and 3, 6.



SPECIFICATION


LAN ports:	1 pcs RJ45
Transmission ports:	1 pcs BNC
Transmission speed:	10 / 100 Mbps
Transmission range:	max. 1000 m @ 10 Mbps max. 400 m @ 100 Mbps The range of data transfer and power supply is strongly dependent on the cable used and the power required to supply the receiver
Protections:	Overvoltage
Main features:	• Plug & Play • MDI/MDI-X auto detection feature - auto detecting the data transmission mode • Support for IP cameras and network devices • Easy installation - doesn't require any configuration of IP nor MAC address • Power supply PoE - pins 1, 2 and 3, 6 • The device operates from the camera side • Possibility to mount on a wall, or on the DIN TS-35 rail • UTP cable length to the camera max. 2 m
Power supply:	• ePoE • PoE (802.3af/at)
Weight:	0.07 kg
Dimensions:	79 x 64 x 23 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Device connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

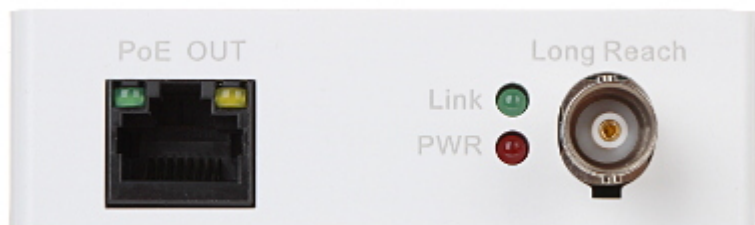


Rear view:



Side view:



Transmission schematic diagram:

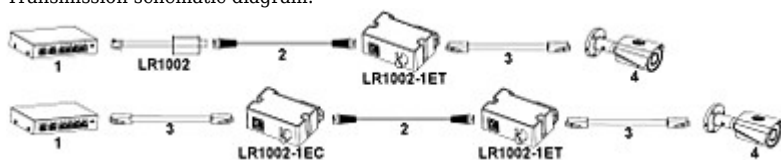

1. ePoE Switch
2. Coaxial cable
3. UTP cat. 5e
4. Camera IP ePoE
5. Switch PoE
6. Camera IP PoE

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------