

Code: ROP-100/PL

CONVENTIONAL MANUAL CALL POINT **ROP-100/PL** SATEL

Net: **18.90 EUR** Gross: **18.90 EUR**

This button is a device designed to instantly trigger the alarm and (or) initiate the procedure of reporting an emergency situation in protected facility to the monitoring station.
The call point is designed to be used in conjunction with the SATEL CSP fire alarm control panels.



SPECIFICATION

Main features:	• The kit includes two panes: : glass pane for single use, plastic pane for multiple use • If a glass pane is used, the alarm reset is only possible after a pane replacement (available separately) • If a plastic pane is used, it is possible to reset the alarm with using the included key • Included key enables opening the device, alarm test and alarm reset
Power supply:	9 V ... 30 V DC
Current consumption:	≤ 41 mA
Operation temp:	-5 °C ... 55 °C
Weight:	0.15 kg
Dimensions:	87 x 87 x 56 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION


Front view:




Mounting side view:




View after remove the cover:

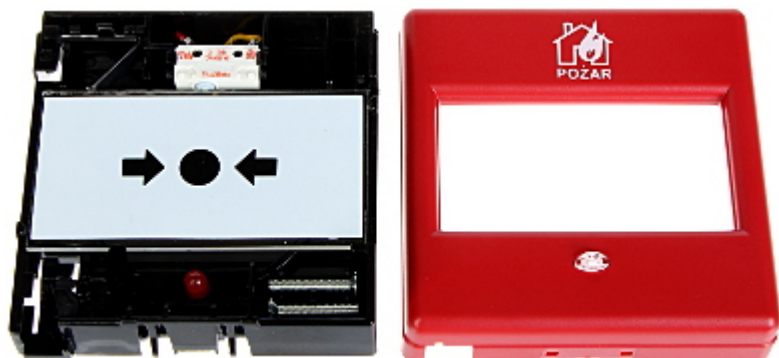

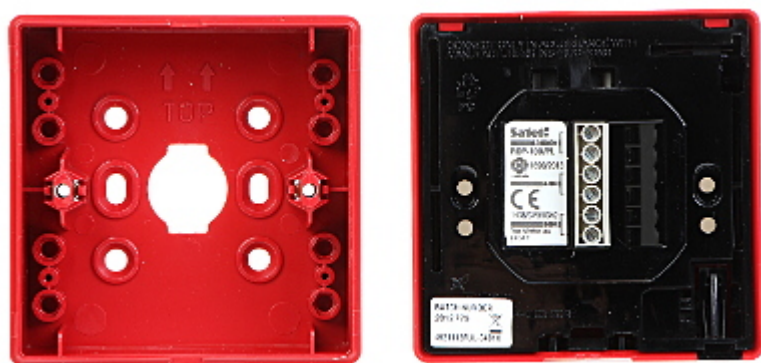

In the kit:

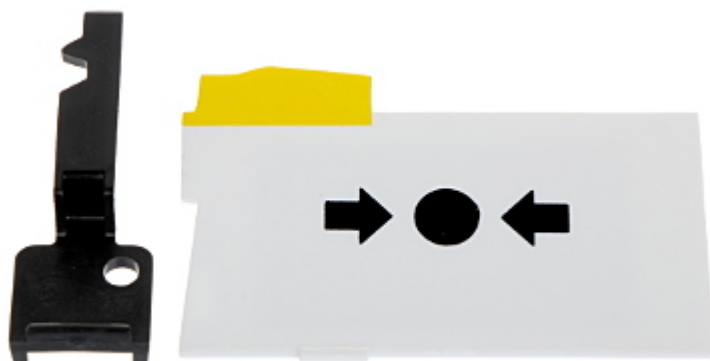

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------